

**Lyons Avenue/Dockweiler Road Extension Project  
Draft Environmental Impact Report**

**Appendix I  
Traffic Impact Study**

# TRAFFIC IMPACT ANALYSIS

## LOS ANGELES

145 S. Spring Street  
Suite 120  
Los Angeles, CA 90012  
213.785.7887

## ONTARIO

4200 Concourse, Suite 150  
Ontario, CA 91764  
(909) 481-5750

## SAN DIEGO

600 B Street, Suite 1600  
San Diego, CA 92101  
(619) 400-0600

## SANTA BARBARA

1114 State Street, Suite 316  
Santa Barbara, CA 93101  
(805) 962-8590

## SANTA CLARITA

25152 Springfield Court  
Suite 350  
Santa Clarita, CA 91355-1096  
661.284.7400  
Fax 661.284.7401

## TEMECULA

41951 Remington Avenue  
Suite 130  
Temecula, CA 92590-3745  
951.294.9300  
Fax: 951.294-9301

## TUSTIN

17782 17th Street  
Suite 200  
Tustin, CA 92780-1947  
714.665.4500  
Fax:  
714.665.4501

## VICTORVILLE

14297 Cajon Avenue  
Suite 101  
760.524.9100  
Fax 760.524.9101

[www.deainc.com](http://www.deainc.com)

## DOCKWEILER DRIVE ALIGNMENT PROJECT SANTA CLARITA, CA

CITY OF SANTA CLARITA

*Prepared by:*



DAVID EVANS  
AND ASSOCIATES INC.

**UPDATED REPORT  
August 8, 2017**



August 8, 2017

Job No. SCLA0000-0004

Mike Hennawy,  
Senior Engineer  
**City of Santa Clarita**

**RE: DRAFT REPORT - TRAFFIC IMPACT ANALYSIS – DOCKWEILER DRIVE ALIGNMENT  
PROJECT - Santa Clarita, California**

Dear Mr. Hennawy;

**David Evans and Associates, Inc.** is pleased to submit this Traffic Impact Analysis report for the proposed Dockweiler Drive Alignment project located in the City of Santa Clarita. The Dockweiler Drive Alignment project is intended to serve as a major east-west corridor link segment in the area and to facilitate access to existing and planned development. Construction of this link is anticipated to reduce "cross valley" trip lengths and travel times, provide an alternate travel route, support a multi-modal transportation network by reducing bus travel times in the City and by providing the opportunity for increased bike and pedestrian traffic.

The Dockweiler Drive Alignment project analysis consists of a No Build Condition, Proposed Project, and two (2) Alternatives.

The report examines the traffic impacts specifically for the No Build Condition, the Proposed Project, and two (2) Alternatives. The report also addresses the impacts of overall growth within the area to represent utilization of the proposed Dockweiler Drive Alignment Alternative. This expansion is considered in the North Newhall Specific Plan and The Master's College Master Plan Traffic Impact Analysis. This report should satisfy the approval requirements for the City of Santa Clarita Traffic Division.

We are pleased to have been of assistance to you in processing and obtaining approval for the project. If you have any questions or comments, please feel free to contact me at 760-524-9115.

Respectfully submitted,

**David Evans and Associates, Inc.**


  
Robert A. Kilpatrick, P.E., T.E.  
Senior Project Manager / Senior Associate





TABLE OF CONTENTS

1 INTRODUCTION ..... 1

1.1 City Circulation Plan..... 1

1.2 Design Alternatives ..... 5

    Proposed Project ..... 5

    Alternative 1 ..... 5

    Alternative 2..... 5

2 EXISTING CONDITION ..... 9

    Existing Street System ..... 9

    Existing Traffic Volumes.....10

    Capacity Analysis Methodologies.....13

    2.1 Existing Traffic Analysis .....14

3 PROJECT CONDITION – YEAR 2019 .....16

    Project Year 2019 Traffic Analysis .....16

    3.1 No- Build Condition .....16

    3.2 Proposed Project Condition .....21

    3.3 Alternative 1 Condition.....26

    3.4 Alternative 2 Condition.....31

4 FUTURE CONDITION – YEAR 2035 .....36

    Future Year 2035 Traffic Analysis .....36

    4.1 No- Build Condition .....36

    4.2 Proposed Project Condition .....41

    4.3 Alternative 1 Condition.....46

    4.4 Alternative 2 Condition.....51

5 RAILROAD CROSSING ANALYSIS .....56

6 BICYCLE AND PEDESTRIAN FACILITIES.....58

7 PROJECT IMPACT, MITIGATION, AND SUMMARY .....60

    7.1 Proposed Project .....60

        Year 2019 Project Mitigations .....60

        Year 2019 Regional Mitigations .....61

        Year 2035 Project Mitigations .....62

        Year 2035 Regional Mitigations .....62

    7.2 Alternative 1.....63

        Year 2019 Project Mitigations .....63

        Year 2019 Regional Mitigations .....63

        Year 2035 Project Mitigations .....64

        Year 2035 Regional Mitigations .....64

    7.3 Alternative 2.....65

        Year 2019 Project Mitigations .....65

        Year 2019 Regional Mitigations .....65

        Year 2035 Project Mitigations .....66

        Year 2035 Regional Mitigations .....66

8 APPENDIX.....68



## TABLE OF FIGURES

Figure 1-1: Vicinity Map .....	2
Figure 1-2: Santa Clarita Valley Circulation Plan.....	3
Figure 1-3: Santa Clarita Valley Bicycle Master Plan .....	4
Figure 1-4: Proposed Project .....	6
Figure 1-5: Alternative 1.....	7
Figure 1-6: Alternative 2.....	8
Figure 2-1: Existing Study Intersections .....	11
Figure 2-2: Existing Peak Hour Traffic Volumes .....	12
Figure 2-3: Existing Geometrics .....	15
Figure 3-1: Project Year 2019 No-Build Study Intersections.....	17
Figure 3-2: Project Year 2019 No-Build Traffic Volumes .....	18
Figure 3-3: Project Year 2019 No-Build Geometrics.....	20
Figure 3-4: Project Year 2019 Proposed Project Study Intersections .....	22
Figure 3-5: Project Year 2019 Proposed Project Traffic Volumes.....	23
Figure 3-6: Project Year 2019 Proposed Project Geometrics .....	25
Figure 3-7: Project Year 2019 Alternative 1 Study Intersections.....	27
Figure 3-8: Project Year 2019 Alternative 1 Traffic Volumes .....	28
Figure 3-9: Project Year 2019 Alternative 1 Geometrics.....	30
Figure 3-10: Project Year 2019 Alternative 2 Study Intersections.....	32
Figure 3-11: Project Year 2019 Alternative 2 Traffic Volumes .....	33
Figure 3-12: Project Year 2019 Alternative 2 Geometrics.....	35
Figure 4-1: Future Year 2035 No-Build Study Intersections.....	37
Figure 4-2: Future Year 2035 No-Build Traffic Volumes .....	38
Figure 4-3: Future Year 2035 No-Build Intersection Geometrics .....	40
Figure 4-4: Future Year 2035 Proposed Project Intersections .....	42
Figure 4-5: Future Year 2035 Proposed Project Traffic Volumes .....	43
Figure 4-6: Future Year 2035 Proposed Project Geometrics .....	45
Figure 4-7: Future Year 2035 Alternative 1 Study Intersections .....	47
Figure 4-8: Future Year 2035 Alternative 1 Traffic Volumes .....	48
Figure 4-9: Future Year 2035 Alternative 1 Geometrics .....	50
Figure 4-10: Future Year 2035 Alternative 2 Study Intersections .....	52
Figure 4-11: Future Year 2035 Alternative 2 Traffic Volumes .....	53
Figure 4-12: Future Year 2035 Alternative 2 Geometrics .....	55
Figure 6-1: Santa Clarita Valley’s Bicycle and Pedestrian Facilities .....	59



TABLE OF TABLES

Table 2-1: HCM 2010 - LOS Criteria for Signalized Intersections .....13  
 Table 2-2: HCM 2010 - LOS Criteria for TWSC, AWSC, and Roundabout Intersections .....13  
 Table 2-3: Intersection Capacity Analysis – Existing Condition .....14  
 Table 3-1: Intersection Capacity Analysis – Year 2019 No-Build Condition .....19  
 Table 3-2: Intersection Capacity Analysis – Year 2019 Proposed Project Condition .....24  
 Table 3-3: Intersection Capacity Analysis – Year 2019 Alternative 1 Condition .....29  
 Table 3-4: Intersection Capacity Analysis – Year 2019 Alternative 2 Condition .....34  
 Table 4-1: Intersection Capacity Analysis – Year 2035 No-Build Condition .....39  
 Table 4-2: Intersection Capacity Analysis – Year 2035 Proposed Project Condition .....44  
 Table 4-3: Intersection Capacity Analysis – Year 2035 Alternative 1 Condition .....49  
 Table 4-4: Intersection Capacity Analysis – Year 2035 Alternative 2 Condition .....54  
 Table 5-1: Railroad Crossing Analysis – Existing Condition .....56  
 Table 5-2: Railroad Crossing Analysis – Project Year 2019 Condition .....57  
 Table 5-3: Railroad Crossing Analysis – Future Year 2035 Condition .....57

## 1 INTRODUCTION

The City of Santa Clarita is one of the fastest growing cities in Los Angeles County. The City's General Plan includes several large developments in the area, and traffic volumes are expected to increase significantly. As such the City of Santa Clarita has identified a project to extend Dockweiler Drive to Lyons Avenue. The proposed Dockweiler Drive Alignment project is located in the City of Santa Clarita, approximately 35 miles northwest of the City of Los Angeles, in the Newhall area of the City. Sierra Highway and the SR-14 (Antelope Valley) Freeway provide a boundary for the study area along the eastern side. Through traffic access on Placerita Canyon Road is restricted with a gate entrance west of Sierra Highway. Placerita Canyon Road currently is the primary connection to The Master's College and residents to the north. Newhall Avenue on the southern boundary of the study area provides a direct connection for cross valley traffic and connects Sierra Highway and Railroad Avenue. The UP/Metrolink Railroad line restricts access to the west with three (3) existing at-grade railroad crossings located at 13<sup>th</sup> Street, Market Street, and Newhall Avenue. *Figure 1-1* illustrates the vicinity map and project location.

The extension of Lyons Avenue to Dockweiler Drive across the existing Metrolink line has been identified by the City as one (1) of five (5) key transportation projects. The alignment is part of the City's General Plan and consistent with the goals of the Downtown Newhall Specific Plan, Santa Clarita Valley Consolidated Traffic Model (SCVCTM), and the Compass Blue Print Plan.

The purpose of the Dockweiler Drive Alignment Project is to ascertain the feasibility of the General Plan alignment for Dockweiler Drive, which identifies the connection of Dockweiler Drive to Lyons Avenue at Railroad Avenue. The project would extend Lyons Avenue from its existing terminus at Railroad Avenue on the west to future Master College Master Plan Dockweiler extension at north of railroad crossing consistent with the Council-approved Compass Blueprint Concept Plan. This project would include the consideration of a new at-grade rail crossing at Lyons Avenue and Railroad Avenue, which is expected to result in the closure of the 13th Street rail crossing.

This report examines the traffic impacts specifically for the No Build Condition, the Proposed Project, and two (2) Alternatives. The report also addresses the impacts of overall projected growth within the area to represent utilization of the proposed Dockweiler Drive Alignment alternative. Consideration will be provided to pedestrian, rail, and vehicular traffic within the study area. The study area is based on the North Newhall Specific Plan Stage II.


### 1.1 City Circulation Plan

The Santa Clarita Valley's circulation system is a comprehensive transportation network of roadways, multi-use trails, bicycle paths, bus transit, and commuter rail. This network provides mobility options to Valley residents and businesses. *Figure 1-2* illustrates a portion of the Santa Clarita Valley Circulation Plan bounded by the study area.

A major component in the development of the Santa Clarita Valley is the inclusion of alternative travel modes and support facilities. These facilities increase efficiency and capacity of existing systems, by promoting mixed-use development near transit facilities. Bicycle lanes and accessibility to bike paths are a fundamental component to a comprehensive transportation network. *Figure 1-3* illustrates a portion of the Santa Clarita Valley's Bicycle Master Plan bounded by the study area.





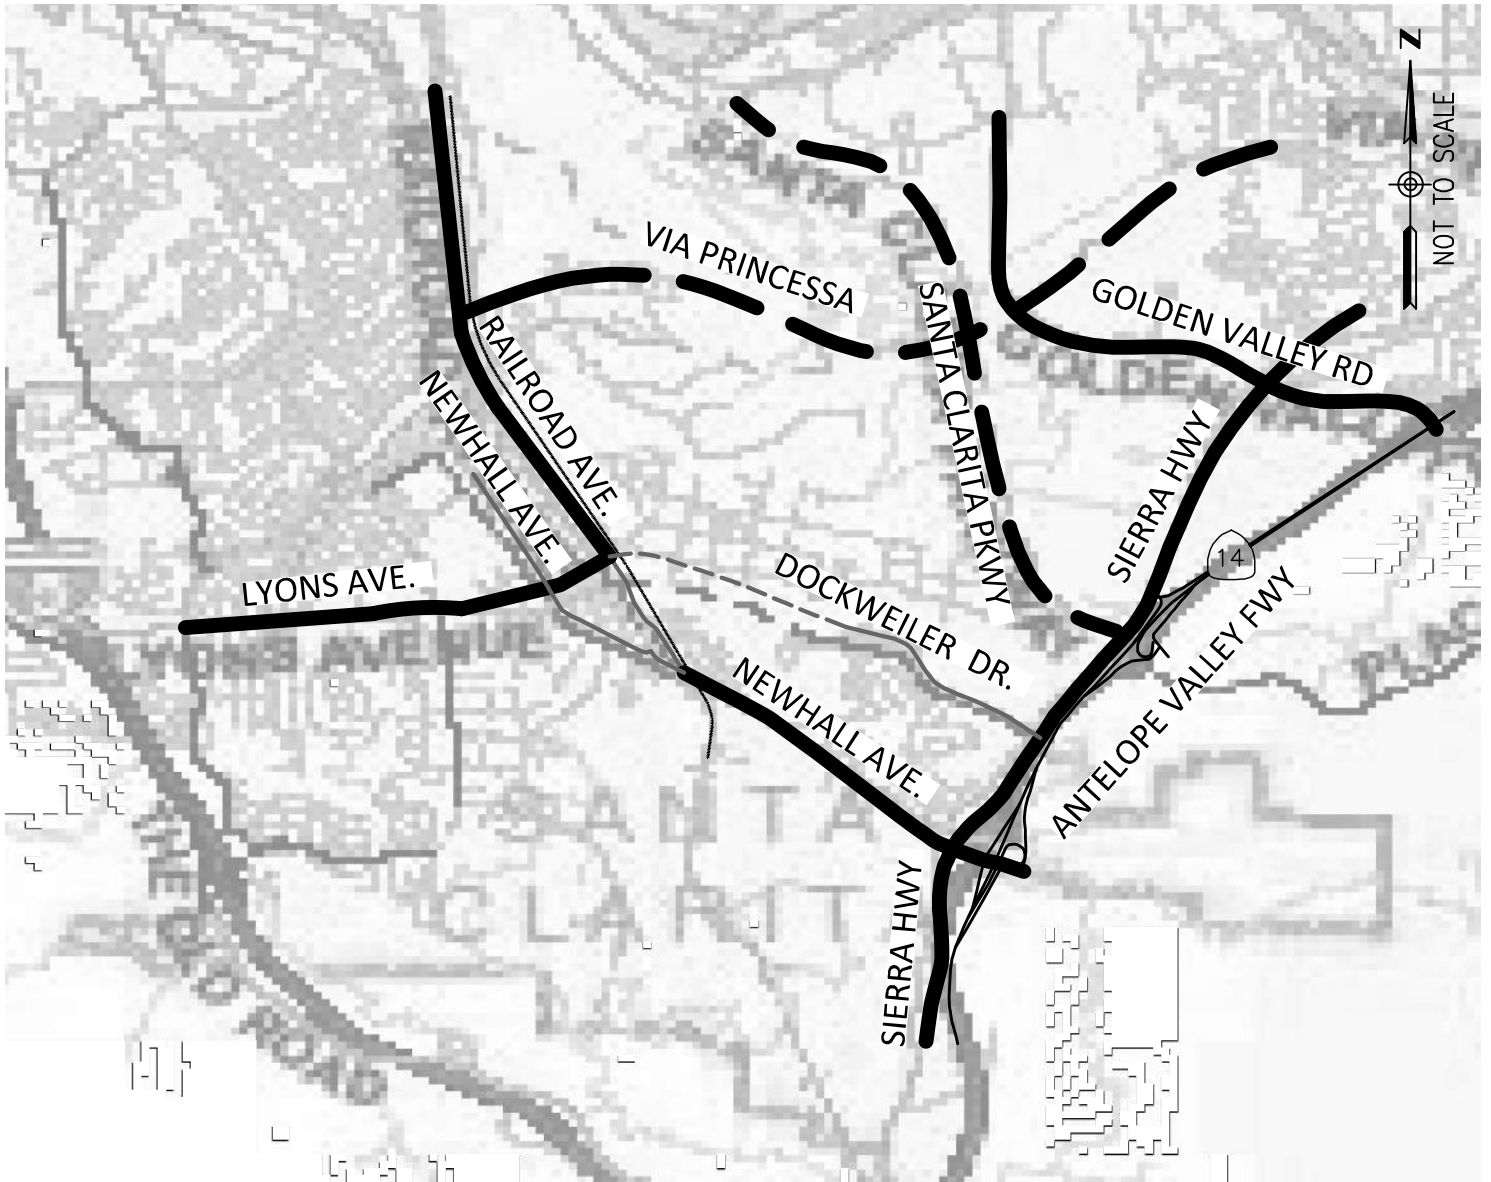

LEGEND:	
	MAJOR HIGHWAY - EXISTING (6 LANES)
	MAJOR HIGHWAY - PROPOSED (6 LANES)
	SECONDARY HIGHWAY EXISTING (4 LANES)
	SECONDARY HIGHWAY PROPOSED (4 LANES)



FIGURE 1-2: SANTA CLARITA VALLEY CIRCULATION PLAN  
 PROPOSED EXPANSION OF DOCKWEILER DRIVE  
 SANTA CLARITA, CALIFORNIA



## 1.2 Design Alternatives

This report examines the traffic impacts specifically for the No Build Condition, the Proposed Project, and the two (2) Alternatives. The Proposed Project and Alternatives consider combinations of constructing a new railroad crossing at Lyons Avenue and removing or improving the at-grade crossing at 13<sup>th</sup> Street. The alternatives are outlined as follows;

### ***Proposed Project***

The Proposed Project utilizes the City of Santa Clarita's General Plan proposed alignment for Dockweiler Drive, which identifies the connection of Dockweiler Drive to extend to Lyons Avenue. The Proposed Project would extend Lyons Avenue from its existing terminus at Railroad Avenue, eastward to Dockweiler Drive to provide a T-intersection. Included in the Proposed Project is reprofiling the intersection of Lyons Avenue and Railroad Avenue to allow the construction of a new SCRA/UP railroad grade crossing east of Railroad Avenue. The new Lyons Avenue railroad grade crossing will improve traffic movements and safety at the railroad crossing. The new crossing will allow the removal of the existing 13<sup>th</sup> Street and Railroad grade crossing, which will avoid direct impact to the Placerita Canyon neighborhood. The Proposed Project is illustrated in *Figure 1-4*.


### ***Alternative 1***

Alternative 1 utilizes the City of Santa Clarita's General Plan proposed alignment for Dockweiler Drive, which identifies the connection of Dockweiler Drive to extend to Arch Street. The project would extend Lyons Avenue from its existing terminus at Railroad Avenue, eastward to Dockweiler Drive to provide a T-intersection. Included in the Alternative 1 is reprofiling the intersection of Lyons Avenue and Railroad Avenue to allow the construction of a new SCRA/UP railroad grade crossing east of Railroad Avenue and construct improvements to the 13<sup>th</sup> Street rail crossing. Alternative 1 is illustrated in *Figure 1-5*.

### ***Alternative 2***

Alternative 2 utilizes the City of Santa Clarita's General Plan proposed alignment for Dockweiler Drive, which identifies the connection of Dockweiler Drive to extend to Arch Street. The route will continue along Arch Street to 13<sup>th</sup> Street to link to Railroad Avenue. Alternative 2 proposes improvements to the 13<sup>th</sup> Street rail crossing. Alternative 2 is illustrated in *Figure 1-6*.



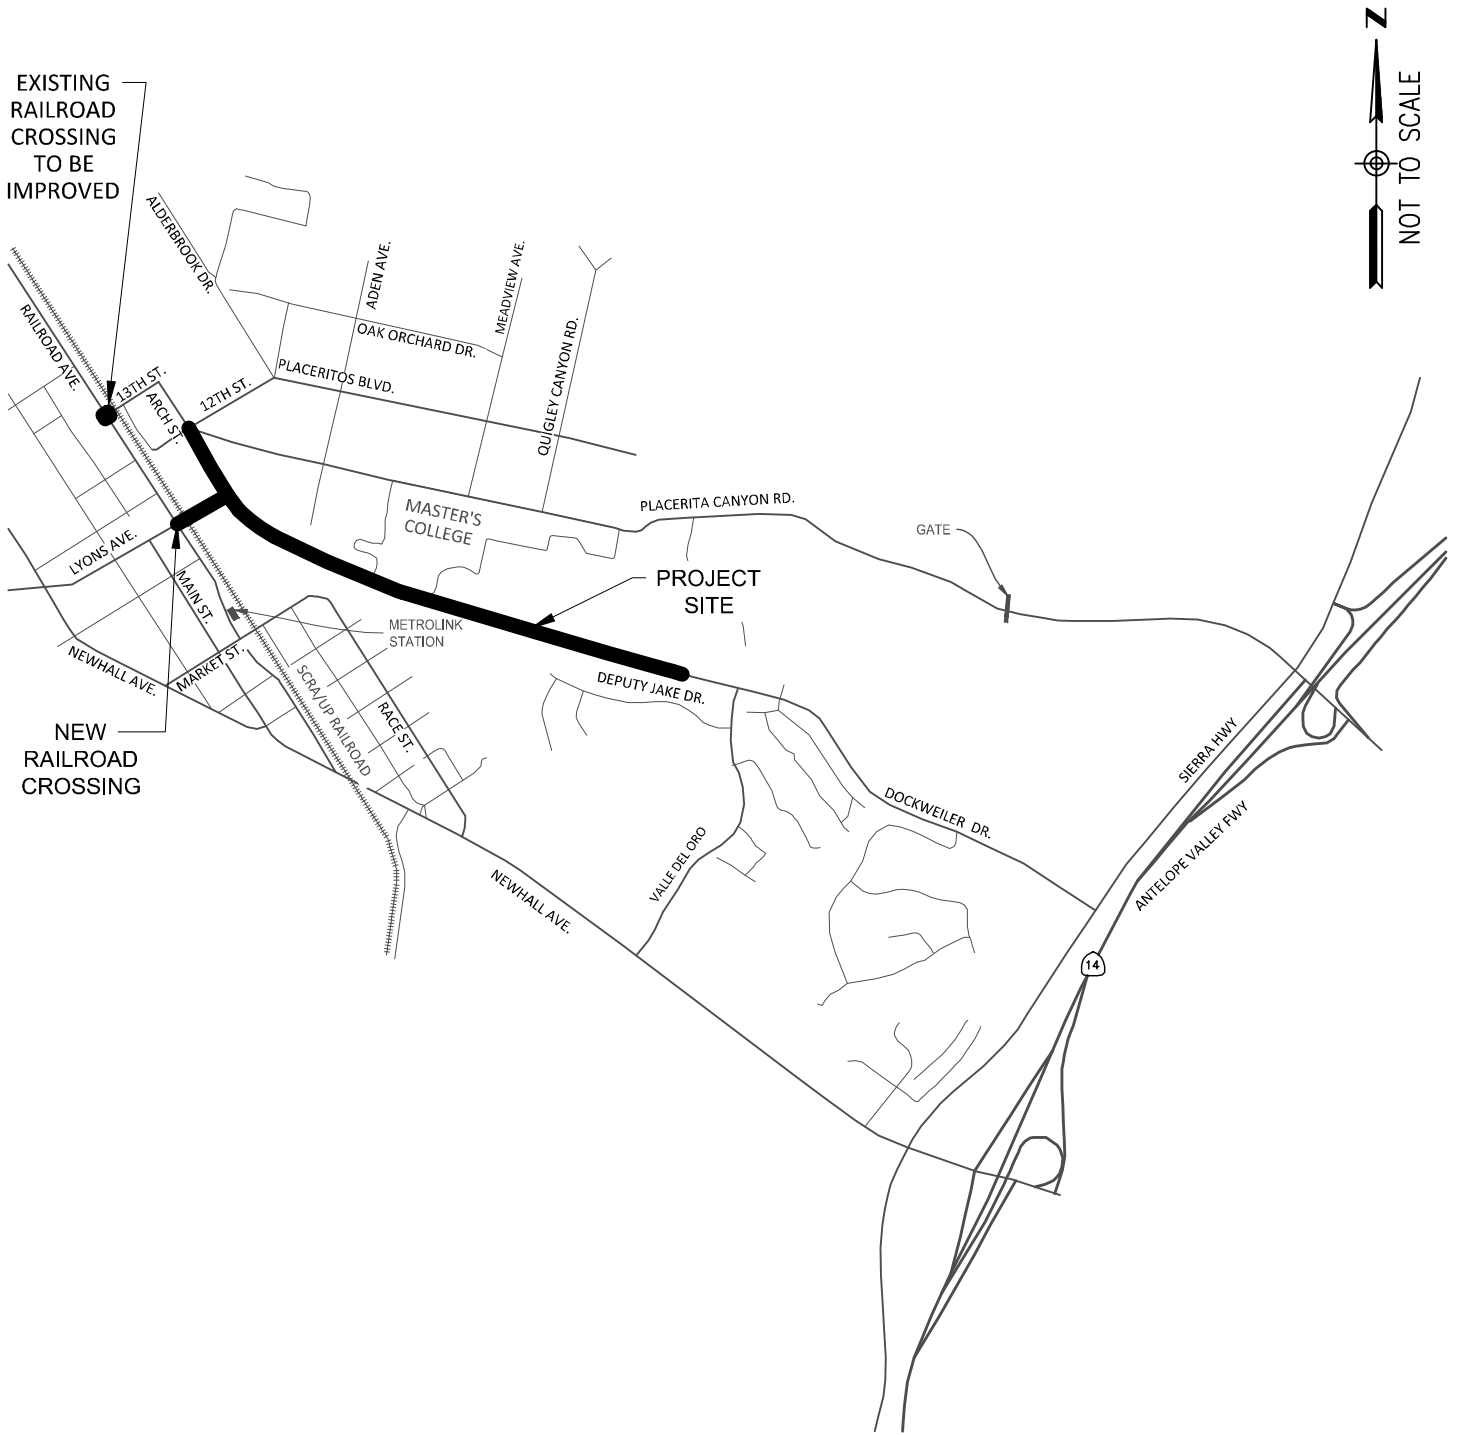

**FIGURE 1-5: ALTERNATIVE 1  
PROPOSED EXPANSION OF  
DOCKWEILER DRIVE  
SANTA CLARITA, CALIFORNIA**



## 2 EXISTING CONDITION

### *Existing Street System*

The following roadways provide access to and within the study area;

**Dockweiler Drive** is designated as an east-west Secondary Highway from Sierra Highway to Railroad Avenue on the City of Santa Clarita Circulation Map Joint Highway Plan. The Existing portion of Dockweiler Drive consists of one lane in each direction with a landscaped median and limited parking throughout the study area. Dockweiler Drive is used as the primary access to single- and multi-family residences.

**State Route 14 Freeway (SR 14)** provides regional access within the study area. The freeway is a four-lane (two in each direction) facility with interchange access at Placerita Canyon Road and Newhall Avenue.

**Lyons Avenue** is designated as an east-west major highway east of Railroad Avenue and Secondary Highway west of Railroad Avenue on the City of Santa Clarita Circulation Map Joint Highway Plan. Three lanes in each direction are provided with traffic signals and left turn channelization at major intersections.

**Newhall Avenue** is designated as a north-south secondary highway from Lyons Avenue to Railroad Avenue with one lane in each direction. From Railroad Avenue to SR-14, Newhall Avenue is designated as a major highway with three northbound lanes and three southbound lanes south of Railroad Avenue. Newhall Avenue roadway designation is identified on the City of Santa Clarita Circulation Map Joint Highway Plan.

**Railroad Avenue** (formerly San Fernando Road) is a north-south major highway from Magic Mountain Parkway to Lyons Avenue and a secondary highway from Lyons Avenue to Newhall Avenue. This roadway provides two lanes in each direction and limited parking throughout the study area. Railroad Avenue roadway designation is identified on the City of Santa Clarita Circulation Map Joint Highway Plan.

**Sierra Highway** is an old alignment of SR-14 from Los Angeles to Mojave. It is designated as a north-south major highway on the City of Santa Clarita Map Joint Highway Plan. It is a four lane (two in each direction) with traffic signals and left turn channelization at major intersections.

**Placerita Canyon Road** is an east-west local roadway. This roadway provides a gate at the western entrance. The gate provides restrictive access to residents of the Placenta Canyon neighborhood.

**13<sup>th</sup> Street** is an east-west unimproved local roadway. This roadway provides access to The Master's College and the Placenta Canyon neighborhood via its intersection with Railroad Avenue. One lane is provided in each direction.



As presented, in *Figure 2-1*, the project begins at the terminus of Dockweiler Drive 500 feet west of Valle Del Oro. Based on potential traffic impacts to the area roadways, seventeen (17) intersections have been identified for analysis;

1. Sierra Highway and SR-14 Freeway Southbound Ramps
2. Sierra Highway and Placerita Canyon Road
3. SR-14 Freeway Northbound Ramps and Placerita Canyon Road
4. Sierra Highway and Dockweiler Drive
5. SR-14 Freeway Southbound Ramps and Newhall Avenue
6. Sierra Highway and Newhall Avenue
7. Valle Del Oro and Newhall Avenue
8. Valle Del Oro and Dockweiler Drive
9. Railroad Avenue and Newhall Avenue
10. Railroad Avenue and Market Street
11. Newhall Avenue and Lyons Avenue
12. Railroad Avenue and Lyons Avenue
13. Railroad Avenue and 13<sup>th</sup> Street
14. Main Street and Lyons Avenue
15. Main Street and Newhall Avenue
16. Arch Street and 12<sup>th</sup> Street/Placerita Canyon Road
17. Lyons Avenue and Dockweiler Drive\*



The intersection denoted with an (\*) is a future intersection.

### ***Existing Traffic Volumes***

As referenced from the City of Santa Clarita Circulation Element, Average Daily Traffic (ADT) is a measurement of the average number of vehicles that travel a segment of roadway during a 24-hour period. The ADT is a useful benchmark for determining roadway capacities. *Figure 2-1* illustrates the existing street system ADT and the study intersection locations. The existing 2013 ADT map for the Santa Clarita Valley is referenced from the city website.

*Figure 2-2* illustrates the existing peak hour traffic volumes in the study area. As referenced from the City of Santa Clarita Circulation Element, Peak hour information, which is the highest volume of traffic to pass over a road in a one-hour period, allows for a more detailed method of evaluating traffic conditions along roadways and intersections, and is used whenever operational analysis is required. The traffic volume data used in the intersection capacity analysis were based on traffic counts conducted by Newport Traffic Studies, an independent traffic data collection company. Turn movement counts were collected during the AM (7-9 AM) and PM (4-6 PM) peak periods at the above-mentioned existing intersections identified for detailed analysis. These counts were conducted in December 2012. The resulting turning movement volumes are presented in the Intersection Capacity Analysis Appendix of this report.



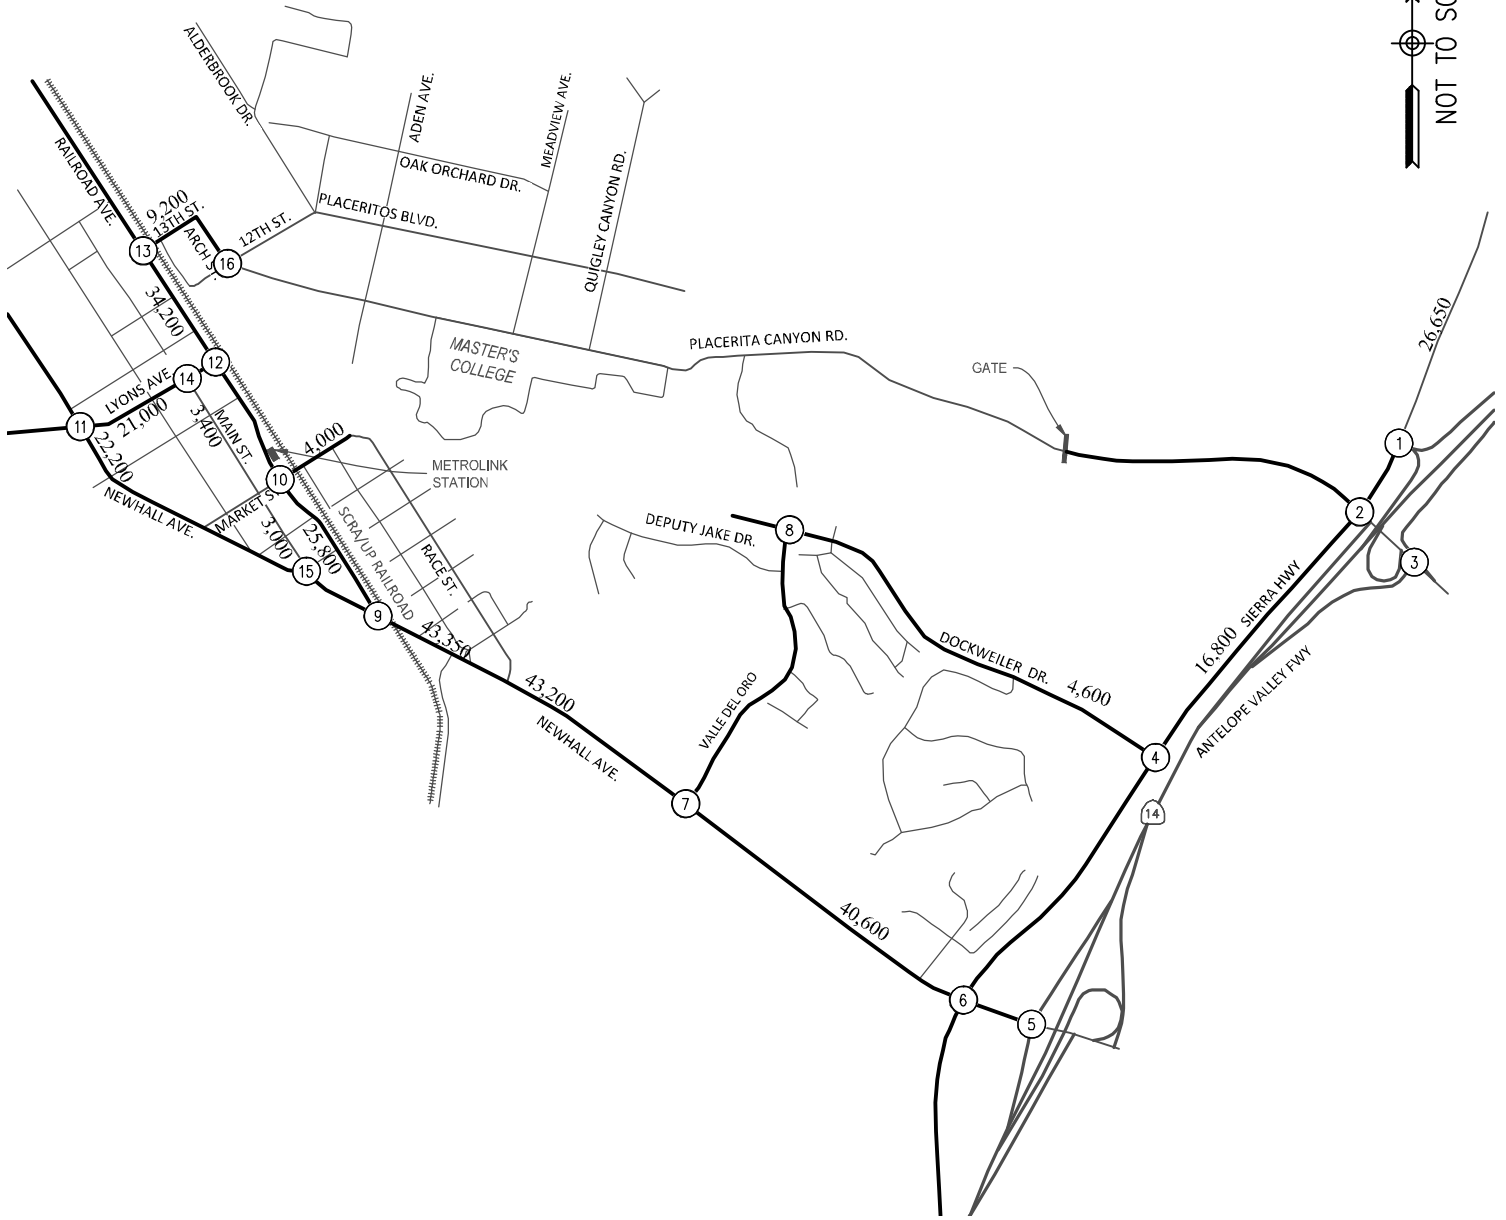

**LEGEND**

Ⓝ - STUDY INTERSECTIONS

X,XXX - AVERAGE DAILY TRAFFIC



**FIGURE 2-1: EXISTING STUDY INTERSECTIONS  
PROPOSED EXPANSION OF DOCKWEILER DRIVE  
SANTA CLARITA, CALIFORNIA**



### Capacity Analysis Methodologies

Based on the existing intersection geometrics and traffic volumes during the AM and PM Peak Hour, the intersection capacity analyses were conducted for the signalized and un-signalized intersections using the Synchro Software. Synchro is released by Trafficware Ltd, version 8. Synchro implements the methods of the 2010 Highway Capacity Manual, chapter 15, 16 and 17; Urban Streets and Signalized intersections. The analysis determines a level-of-service (LOS) which quantitatively describes the operating characteristics of signalized intersections and the maximum delay. The LOS ranges from “A” (the best) through “F” (system breakdown). The level-of-service is based on the average delay of vehicles at the intersections. *Table 2-1* provides the LOS thresholds for signalized intersections per the HCM 2010 methodology.

Table 2-1: HCM 2010 - LOS Criteria for Signalized Intersections

LOS	Control Delay per Vehicle (s/veh)
A	≤ 10
B	> 10 and ≤20
C	> 20 and ≤35
D	> 35 and ≤ 55
E	> 55 and ≤ 80
F	> 80

Source: HCM 2010

For un-signalized intersections the HCM measures the LOS based on the computed or measured control delay for Two Way Stop Controlled intersections (TWSC) and control delay for All Way Stop Controlled (AWSC) intersections. For a TWSC the LOS is computed for each movement and the most critical LOS is the one that describes the effectiveness of that intersection, which is typically the stop controlled left turn movement from the minor street. For an AWSC intersection the LOS defines the whole intersection. *Table 2-2* provides the LOS thresholds for TWSC and AWSC intersections per the HCM 2010 methodology.

Table 2-2: HCM 2010 - LOS Criteria for TWSC, AWSC, and Roundabout Intersections

LOS	Control Delay per Vehicle (s/veh)
A	≤ 10
B	> 10 and ≤15
C	> 15 and ≤25
D	> 25 and ≤ 35
E	> 35 and ≤ 50
F	> 50

Source: HCM 2010

The intersection capacity analyses were conducted for the roundabout intersections using the Sidra Intersection Software. Sidra is released by Akcelik & Associated Pty Ltd, version 6.0. Sidra Intersection 6.0 implements the methods of the 2010 Highway Capacity Manual, Chapter 21. For the roundabout intersections the HCM measures the LOS based on the control delay and the LOS defines the whole intersection. The level-of-service is based on the average delay of vehicles at the intersections. *Table 2-2* provides the LOS thresholds for roundabout intersections per the HCM 2010 methodology.

The City of Santa Clarita preferred maximum acceptable level of service on arterial roads is LOS E. The City of Santa Clarita desired maximum acceptable level of service on residential neighborhood roads is LOS C or better.

## 2.1 Existing Traffic Analysis

To determine the impacts of the project to the study intersections, existing traffic intersection capacity analysis was conducted. The analysis was conducted with the existing intersection geometrics as illustrated in *Figure 2-3*.

Table 2-3: Intersection Capacity Analysis – Existing Condition  
Traffic Impact Analysis – Dockweiler Drive Alignment Project

Intersection		AM		PM	
		Delay (1)	LOS(2)	Delay (1)	LOS(2)
1	Sierra Highway and SR-14 Southbound Ramps (3)	99.99	F	99.99	F
2	Sierra Highway and Placerita Canyon Road	46.8	D	24.1	C
3	SR-14 Northbound Ramps and Placerita Canyon Road (3)	10.7	B	10.7	B
4	Sierra Highway and Dockweiler Drive	12.6	B	7.0	A
5	SR-14 Southbound Ramps and Newhall Avenue (3)	20.3	A	69.1	F
6	Sierra Highway and Newhall Avenue	35.0	D	34.2	C
7	Valle Del Oro and Newhall Avenue	17.8	B	15.8	B
8	Valle Del Oro and Dockweiler Drive (3)	14.8	B	11.5	B
9	Railroad Avenue and Newhall Avenue	23.6	C	30.1	C
10	Railroad Avenue and Market Street	14.3	B	17.4	B
11	Newhall Avenue and Lyons Avenue	32.6	C	45.5	D
12	Railroad Avenue and Lyons Avenue	22.5	C	20.8	C
13	Railroad Avenue and 13 <sup>th</sup> Street	19.8	B	23.1	C
14	Main Street and Lyons Avenue	10.8	B	8.2	A
15	Main Street and Newhall Avenue (4)	12.0	B	42.5	E
16	Arch Street and 12 <sup>th</sup> Street/Placerita Canyon Road (3)	13.8	B	18.6	C

(1) Delay – In Seconds

(2) LOS – Level of Service



(3) Un-Signalized Intersection

(4) Roundabout Intersection

99.99 - Intersection Delay Exceeds Level of Service Standard

Source: **David Evans and Associates, Inc.**

As presented in *Table 2-3* under existing condition, most intersections are operating at LOS “E” or better. There are two (2) intersections that are currently operating at LOS “F.”

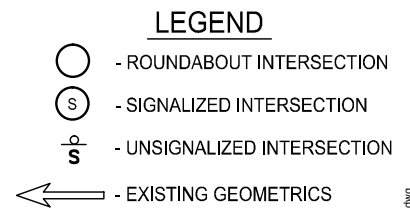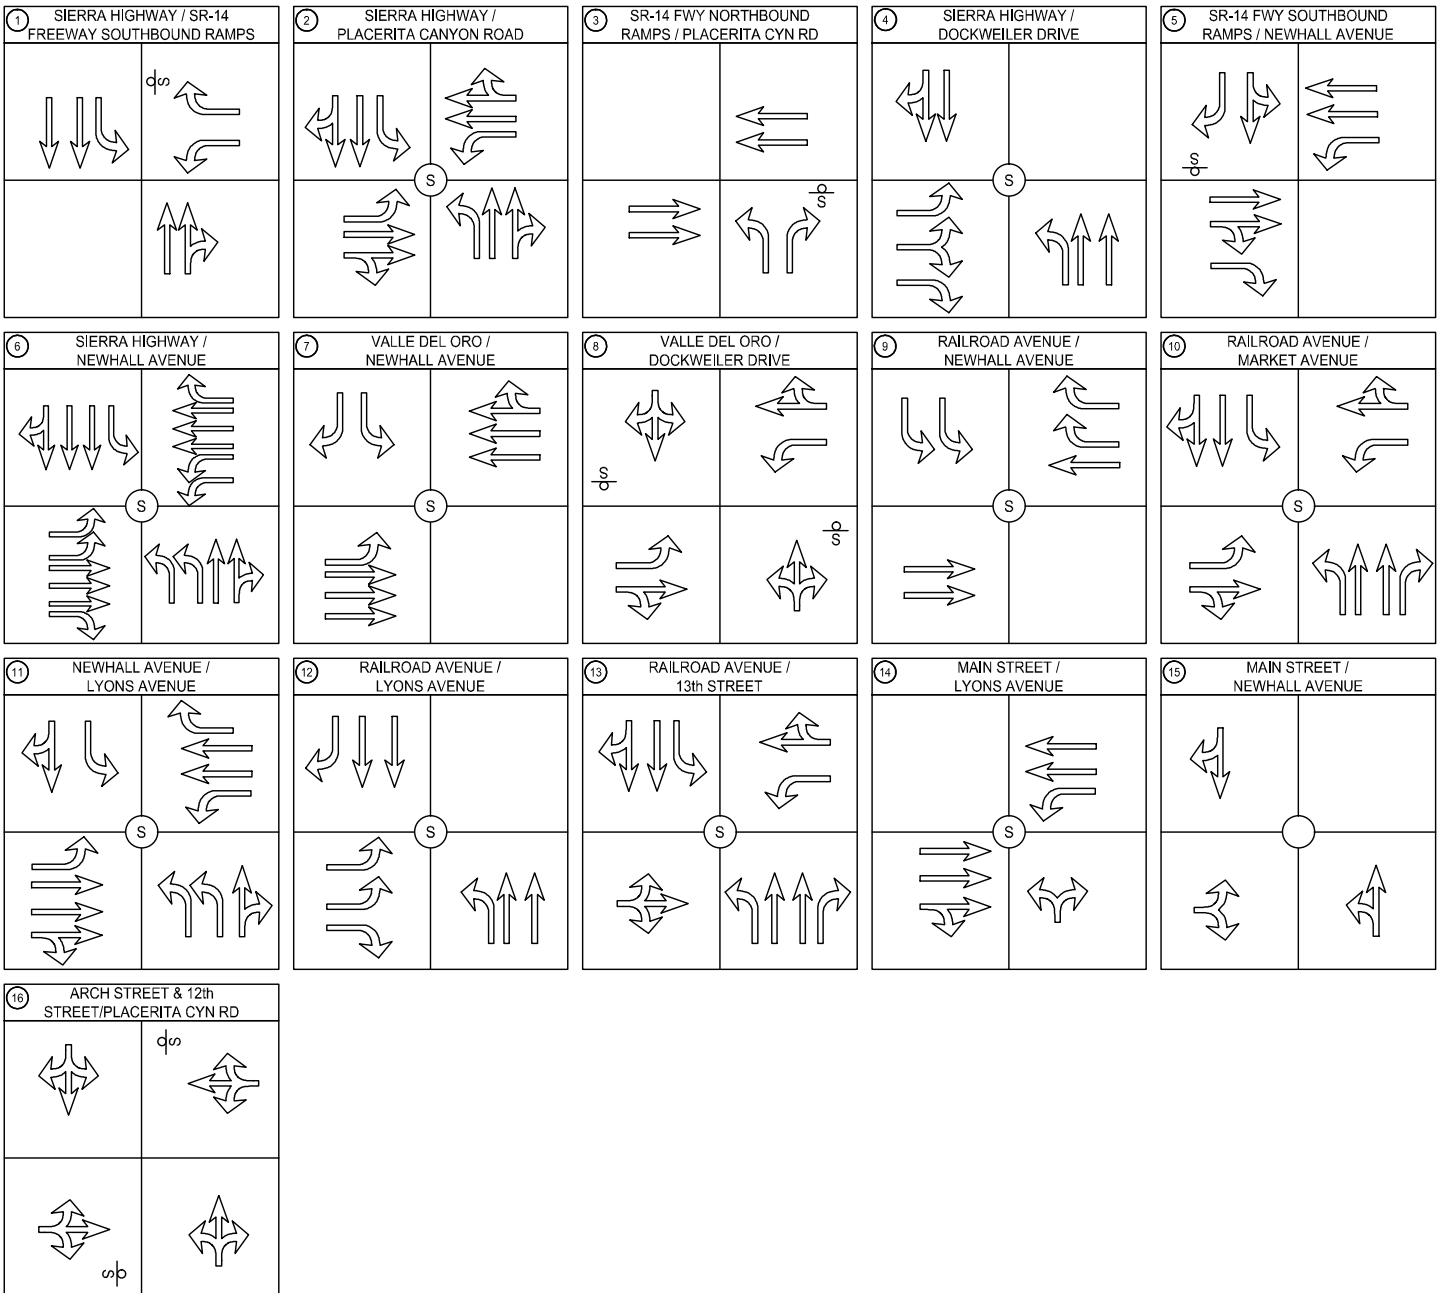

**FIGURE 2-3: EXISTING GEOMETRICS  
PROPOSED EXPANSION OF  
DOCKWEILER DRIVE  
SANTA CLARITA, CALIFORNIA**

### 3 PROJECT CONDITION – YEAR 2019

The proposed Dockweiler Drive Alignment project is located in the City of Santa Clarita, approximately 35 miles northwest of the City of Los Angeles. The proposed Dockweiler Drive Alignment project is enclosed by a residential community near The Master's College. Sierra Highway provides a boundary for the study area along the eastern side. Through traffic access on Placerita Canyon Road is restricted with a gate entrance west of Sierra Highway. Placerita Canyon Road currently is the primary connection to The Master's College and residents to the north. Newhall Avenue on the southern boundary of the study area provides a direct connection for cross valley traffic and connects Sierra Highway and Railroad Avenue. The UP/Metrolink Railroad line restricts access to the west with three (3) existing at-grade railroad crossings located at 13<sup>th</sup> Street, Market Street, and Newhall Avenue. The study area is determined based on the North Newhall Specific Plan Stage II.

The Dockweiler Drive Alignment project is intended to serve as a major east-west corridor link in the area to facilitate access to existing and planned development. The project is proposed to aid the future traffic consistent with the Santa Clarita Valley Consolidated Traffic Model (SCVCTM). Construction of this link is anticipated to reduce "cross valley" trip lengths and travel times, provide an alternate travel route, support a multi-modal transportation network by reducing bus travel times in the City and by providing the opportunity for increased bike and pedestrian traffic.

#### ***Project Year 2019 Traffic Analysis***


A project year of 2019 has been identified as the opening year for the Dockweiler Drive Alignment project. As presented, a Proposed Project and two (2) alternatives have been identified and will provide varying distributions of traffic consistent with anticipated roadway utilization. A major factor in distribution of traffic is the anticipated growth within the study area due to development. The Year 2019 traffic volumes were provided by the City of Santa Clarita using the Santa Clarita Valley Consolidated Traffic Model (SCVCTM) for the Interim Year. Each alternative was modeled to account for the differing distribution of traffic dependent on the alternative. It is to be noted that Other Area Projects anticipated to be constructed by Year 2019, have been incorporated into the SCVCTM, and account for expected growth.

The Year 2019 intersection turn movements were primarily taken directly from the Interim Year SCVCTM specific to each alternative. A few intersection turn movements were determined using existing counts and the link volumes from the Year SCVCTM specific to the alternative. These values were then used in a 'Future Directional Link Volume (NCHRP 255)' calculator to determine Year 2019 Turn Movement Volumes. The intersections included were Valle Del Oro and Dockweiler Drive, Railroad Avenue and Market Street, Main Street and Lyons Avenue, Main Street and Newhall Avenue, Arch Street and 12<sup>th</sup> Street/Placerita Canyon Road, Lyons Avenue and Dockweiler Drive, Aden Avenue and Dockweiler Drive, Aden Avenue and Placeritos Boulevard, Aden Avenue and Placerita Canyon Road.

#### 3.1 No- Build Condition

The Santa Clarita Valley Consolidated Traffic Model (SCVCTM) for Interim Year provided traffic volumes for the Project Year 2019 Condition. The model plots provided a No-Build Condition outlining the distribution of future traffic without the project. The Project Year 2019 No-Build study intersections provided in *Figure 3-1*, the volumes provided in *Figure 3-2*.



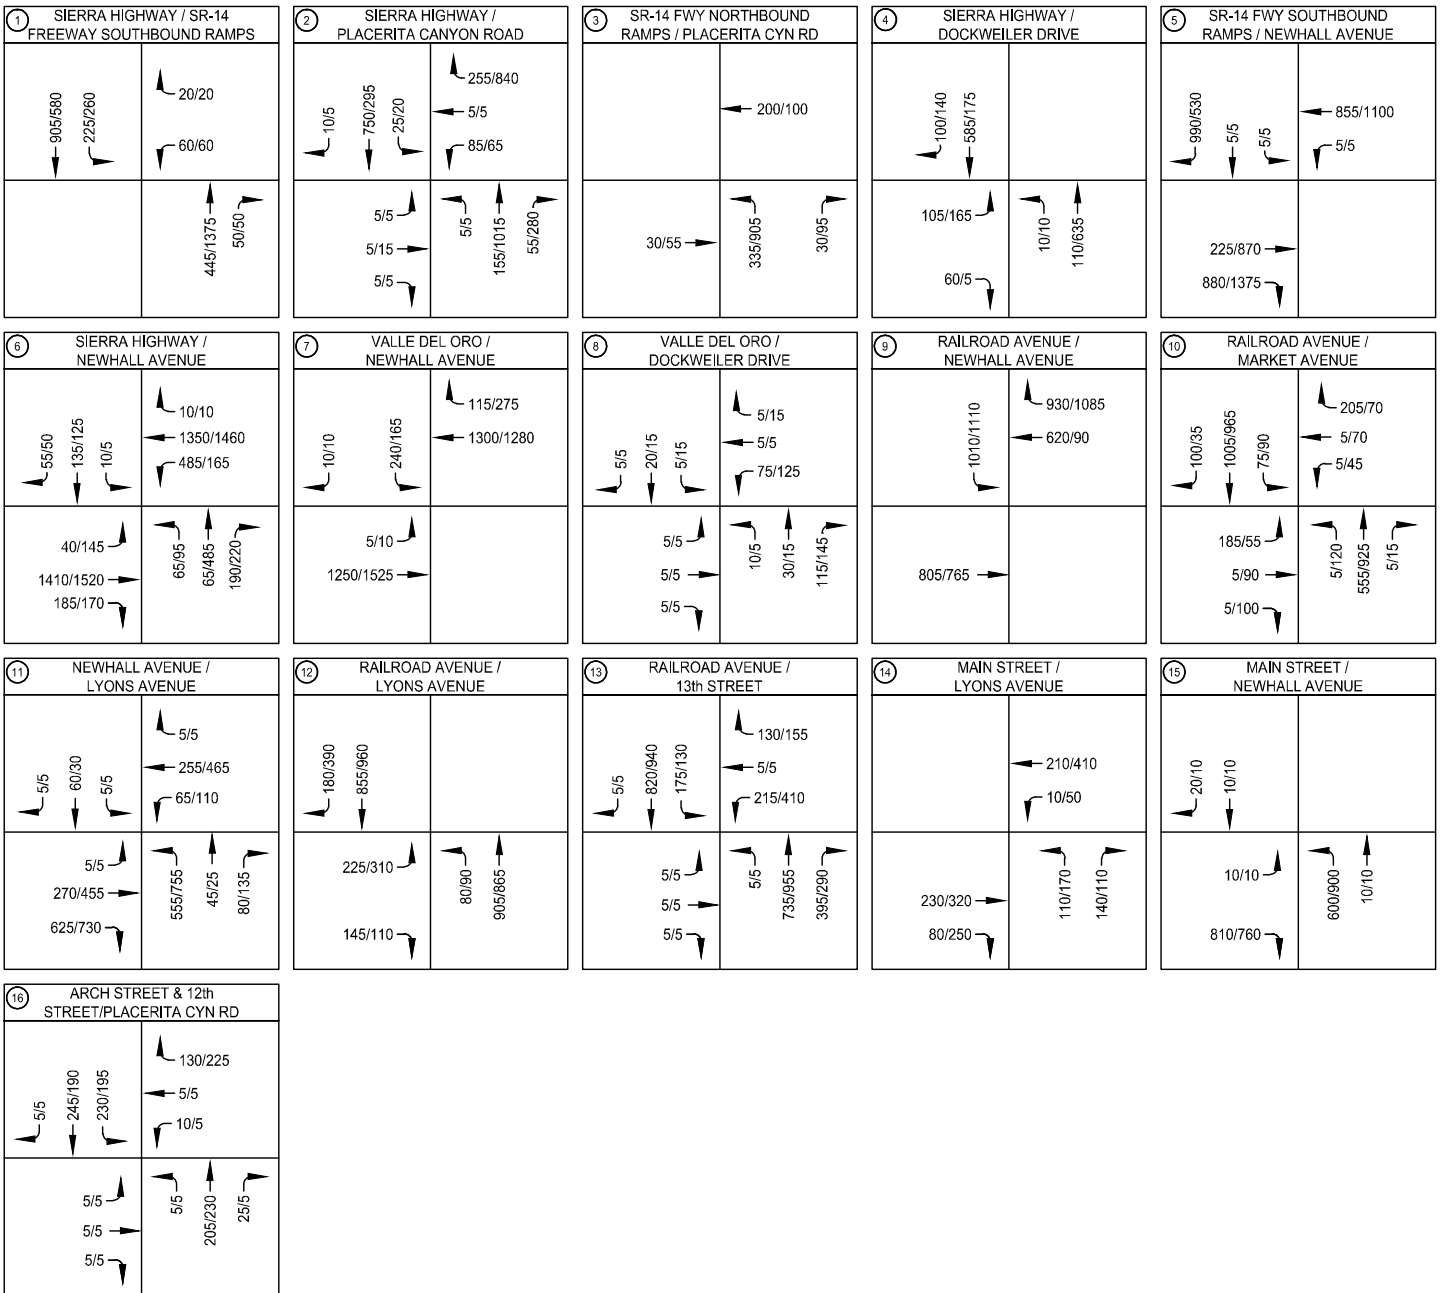

### LEGEND

- Ⓝ - STUDY INTERSECTIONS
- xx/xx - AM/PM PEAK HOUR VOLUMES

FIGURE 3-2: PROJECT YEAR 2019 NO BUILD TRAFFIC VOLUMES  
 PROPOSED EXPANSION OF DOCKWEILER DRIVE  
 SANTA CLARITA, CALIFORNIA





The intersections were analyzed using the capacity analysis methodology described in *Chapter 2*. The analysis was conducted with the existing intersection geometrics illustrated in *Figure 3-3*. The LOS for the study intersections presented in *Table 3-1* represents the LOS for the critical movement. This is typically the stop controlled left turn from the minor street.

Table 3-1: Intersection Capacity Analysis – Year 2019 No-Build Condition  
Traffic Impact Analysis – Dockweiler Drive Alignment Project

Intersection		AM		PM	
		Delay (1)	LOS(2)	Delay (1)	LOS(2)
1	Sierra Highway and SR-14 Southbound Ramps (3)	28.9	D	99.99	F
2	Sierra Highway and Placerita Canyon Road	24.2	C	99.99	F
3	SR-14 Northbound Ramps and Placerita Canyon Road (3)	12.8	B	99.99	F
4	Sierra Highway and Dockweiler Drive	8.9	A	7.4	A
5	SR-14 Southbound Ramps and Newhall Avenue (3)	99.99	F	99.99	F
6	Sierra Highway and Newhall Avenue	27.2	C	29.6	C
7	Valle Del Oro and Newhall Avenue	15.2	B	11.7	B
8	Valle Del Oro and Dockweiler Drive (3)	10.7	B	12.3	B
9	Railroad Avenue and Newhall Avenue	23.3	C	40.8	D
10	Railroad Avenue and Market Street	30	C	17.5	B
11	Newhall Avenue and Lyons Avenue	56.5	E	66.6	E
12	Railroad Avenue and Lyons Avenue	15.9	B	16.7	B
13	Railroad Avenue and 13 <sup>th</sup> Street	28.3	C	48.9	D
14	Main Street and Lyons Avenue	18.5	B	18.4	B
15	Main Street and Newhall Avenue (4)	23.7	C	25.8	D
16	Arch Street and 12 <sup>th</sup> Street/Placerita Canyon Road (3)	22.2	C	25.3	D

(1) Delay – In Seconds

(2) LOS – Level of Service

(3) Un-Signalized Intersection

(4) Roundabout Intersection

99.99 - Intersection Delay Exceeds Level of Service Standard

Source: **David Evans and Associates, Inc.**

As presented in *Table 3-1* under Year 2019 No Build Condition, most of the study intersections are anticipated to continue to operate at LOS “E” or better. There are four (4) intersections that are anticipated to operate at LOS “F.”




### 3.2 Proposed Project Condition

The Santa Clarita Valley Consolidated Traffic Model (SCVCTM) for Interim Year provided traffic volumes for the Project Year 2019 Proposed Project Condition. The model plots outlined the distribution of future traffic with the construction of the Proposed Project. The Project Year 2019 Proposed Project study intersections are provided in *Figure 3-4* and the volumes provided in *Figure 3-5*.

The analysis for the intersection of Arch Street/Dockweiler Drive and 12<sup>th</sup> Street/Placerita Canyon Road was conducted as a 5-leg all way stop controlled intersection. The analysis for the intersection of Lyons Avenue and Dockweiler Drive was conducted as a signalized intersection. The railroad crossing at the intersection of Railroad Avenue and 13<sup>th</sup> Street is proposed to be closed. The intersection will be modified, removing the northbound right turn lane and southbound left turn lane and restricting the eastbound through movement.



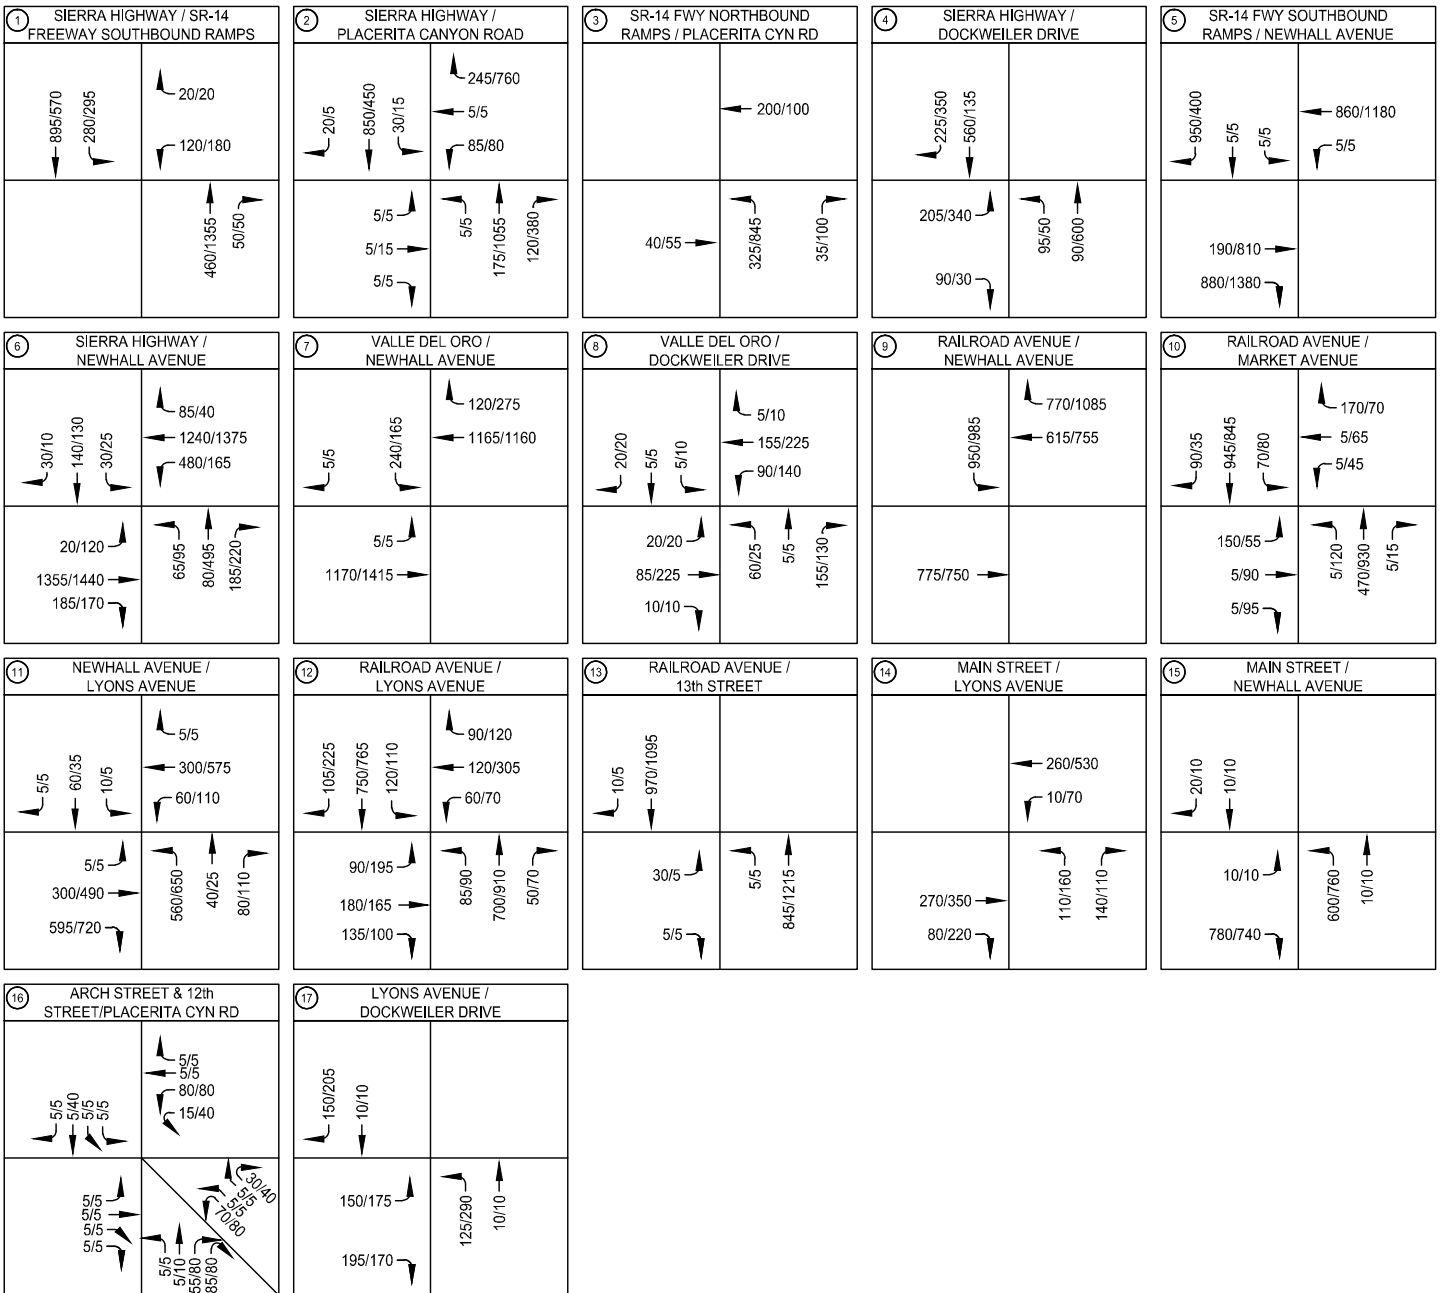

## LEGEND

- ① - STUDY INTERSECTIONS
- xx/xx - AM/PM PEAK HOUR VOLUMES

FIGURE 3-5: PROJECT YEAR 2019  
 PROPOSED PROJECT  
 TRAFFIC VOLUMES  
 PROPOSED EXPANSION OF  
 DOCKWEILER DRIVE  
 SANTA CLARITA, CALIFORNIA



The intersections were analyzed using the capacity analysis methodology described in *Chapter 2*. The analysis was conducted with the Project Year 2019 Proposed Project existing and mitigated study intersection geometrics illustrated in *Figure 3-6*. The LOS for the study intersections presented in *Table 3-2* represents the LOS for the critical movement. This is typically the stop controlled left turn from the minor street.

Table 3-2: Intersection Capacity Analysis – Year 2019 Proposed Project Condition  
Traffic Impact Analysis – Dockweiler Drive Alignment Project

Intersection		AM		PM	
		Delay (1)	LOS(2)	Delay (1)	LOS(2)
1	Sierra Highway and SR-14 Southbound Ramps (3)	88.2	F	99.99	F
	Mitigation (Traffic Signal and Lane Modification)	16.7	B	22.9	C
2	Sierra Highway and Placerita Canyon Road	23.1	C	99.99	F
	Mitigation (Lane Modification)	20.6	C	51.8	D
3	SR-14 Northbound Ramps and Placerita Canyon Road (3)	12.8	B	99.99	F
	Mitigation (Traffic Signal)	15.0	B	14.0	B
4	Sierra Highway and Dockweiler Drive	15.5	B	12.5	B
5	SR-14 Southbound Ramps and Newhall Avenue (3)	99.99	F	99.99	F
	Mitigation (Traffic Signal and Lane Modification)	5.6	A	5.2	A
6	Sierra Highway and Newhall Avenue	26.4	C	29.5	C
7	Valle Del Oro and Newhall Avenue	15.7	B	12.1	B
8	Valle Del Oro and Dockweiler Drive (3)	12.6	B	14.7	B
9	Railroad Avenue and Newhall Avenue	21.4	C	23.4	C
10	Railroad Avenue and Market Street	24.6	C	17.9	B
11	Newhall Avenue and Lyons Avenue	48.2	D	55.5	E
	Mitigation (Lane Modification)	28.8	C	33.7	C
12	Railroad Avenue and Lyons Avenue	31.7	C	33.4	C
13	Railroad Avenue and 13 <sup>th</sup> Street	9.5	A	8.3	A
14	Main Street and Lyons Avenue	18.4	B	16.4	B
15	Main Street and Newhall Avenue (4)	20.9	C	17.3	C
16	Arch Street/Dockweiler, 12th Street, Placerita Canyon Road (3)	8.4	A	8.7	A
17	Lyons Avenue and Dockweiler Drive	19.7	B	22.9	B

(1) Delay – In Seconds

(2) LOS – Level of Service



(3) Un-Signalized Intersection

(4) Roundabout Intersection

99.99 - Intersection Delay Exceeds Level of Service Standard

Source: **David Evans and Associates, Inc.**

As presented in *Table 3-2* under Year 2019 Project Proposed Project Condition, most of the study intersections are anticipated to continue to operate at LOS “E” or better. There are four (4) intersections that are anticipated to operate at LOS “F.” As such, mitigations are necessary to accommodate the anticipated Year 2019 traffic. A summary of the mitigation is presented in Chapter 7 of this report.

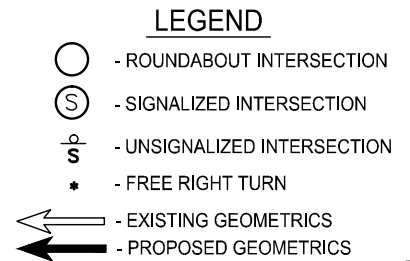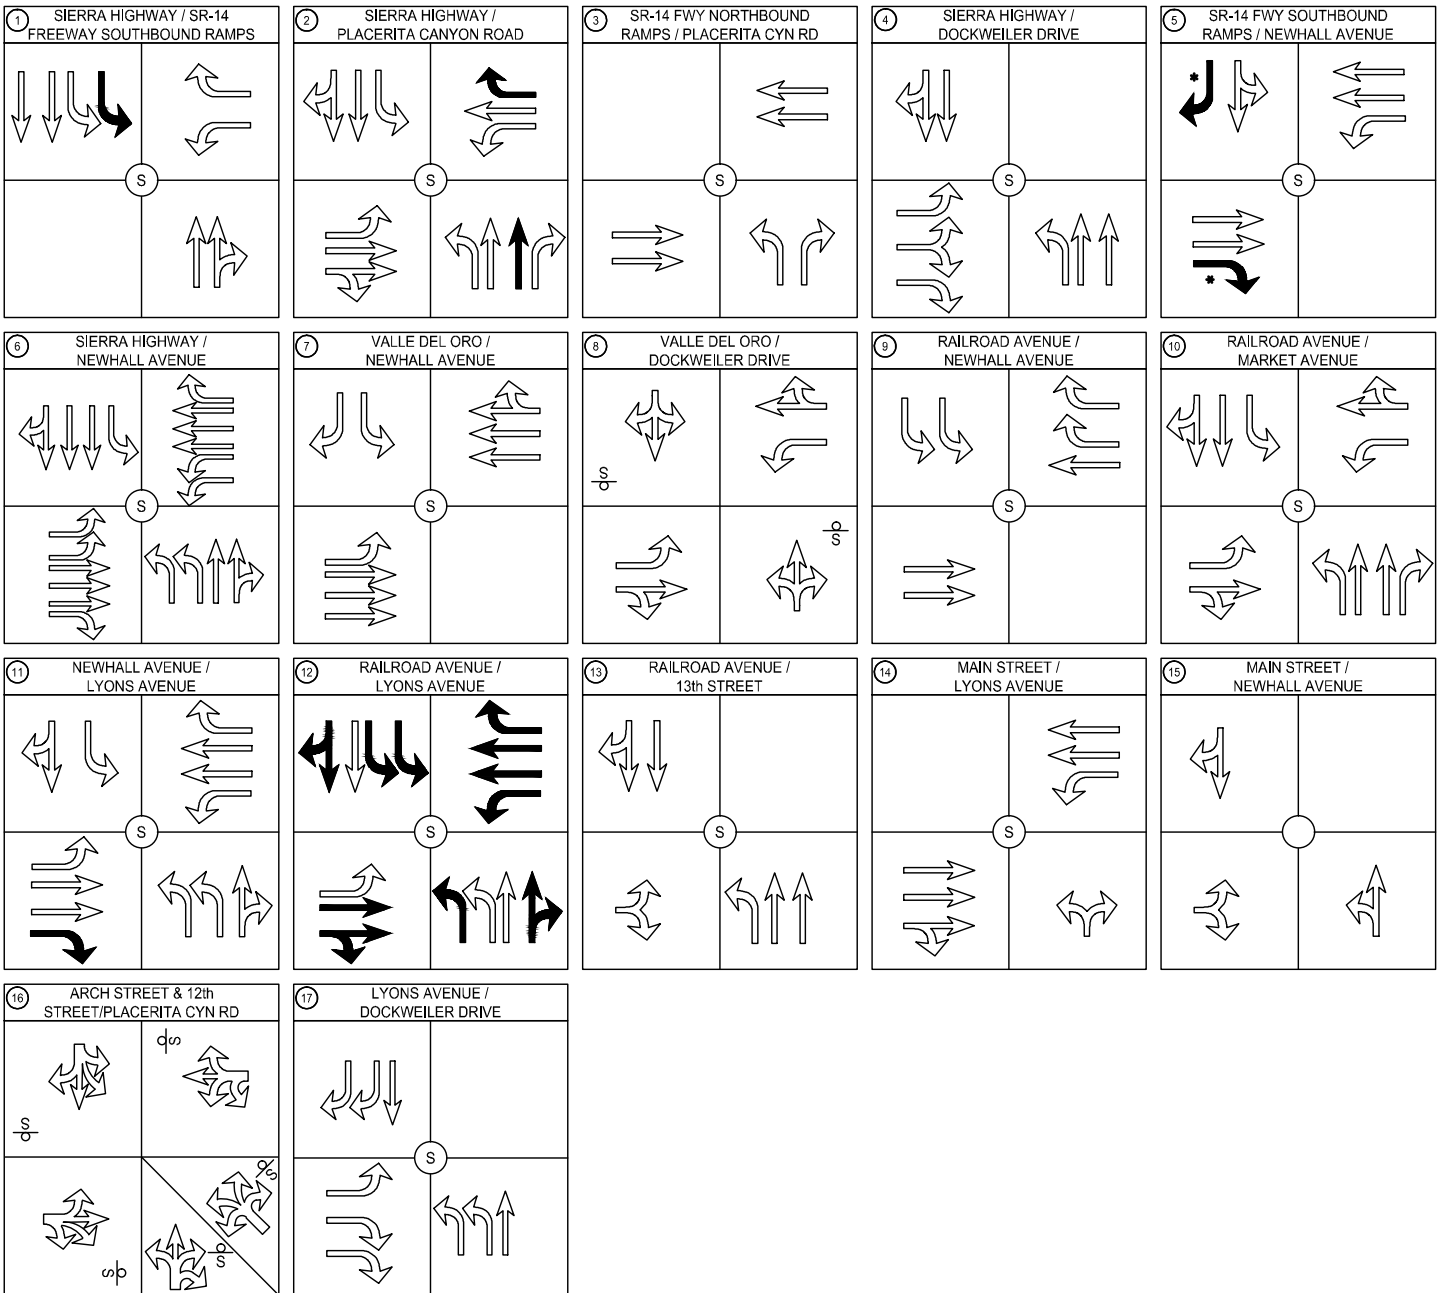


**FIGURE 3-6: PROJECT YEAR 2019  
 PROPOSED PROJECT  
 INTERSECTION GEOMETRICS**  
  
**PROPOSED EXPANSION OF  
 DOCKWEILER DRIVE  
 SANTA CLARITA, CALIFORNIA**

### 3.3 Alternative 1 Condition

The Santa Clarita Valley Consolidated Traffic Model (SCVCTM) for Interim Year provided traffic volumes for the Project Year 2019 Alternative 1 Condition. The model plots outlined the distribution of future traffic with the construction of the project Alternative 1. The Project Year 2019 Alternative 1 study intersections are provided in *Figure 3-7*, and the volumes provided in *Figure 3-8*.

The analysis for the intersection of Arch Street/Dockweiler Drive and 12<sup>th</sup> Street/Placerita Canyon Road was conducted as a 5-leg all way stop controlled intersection. The analysis for the intersection of Lyons Avenue and Dockweiler Drive was conducted as a signalized intersection.



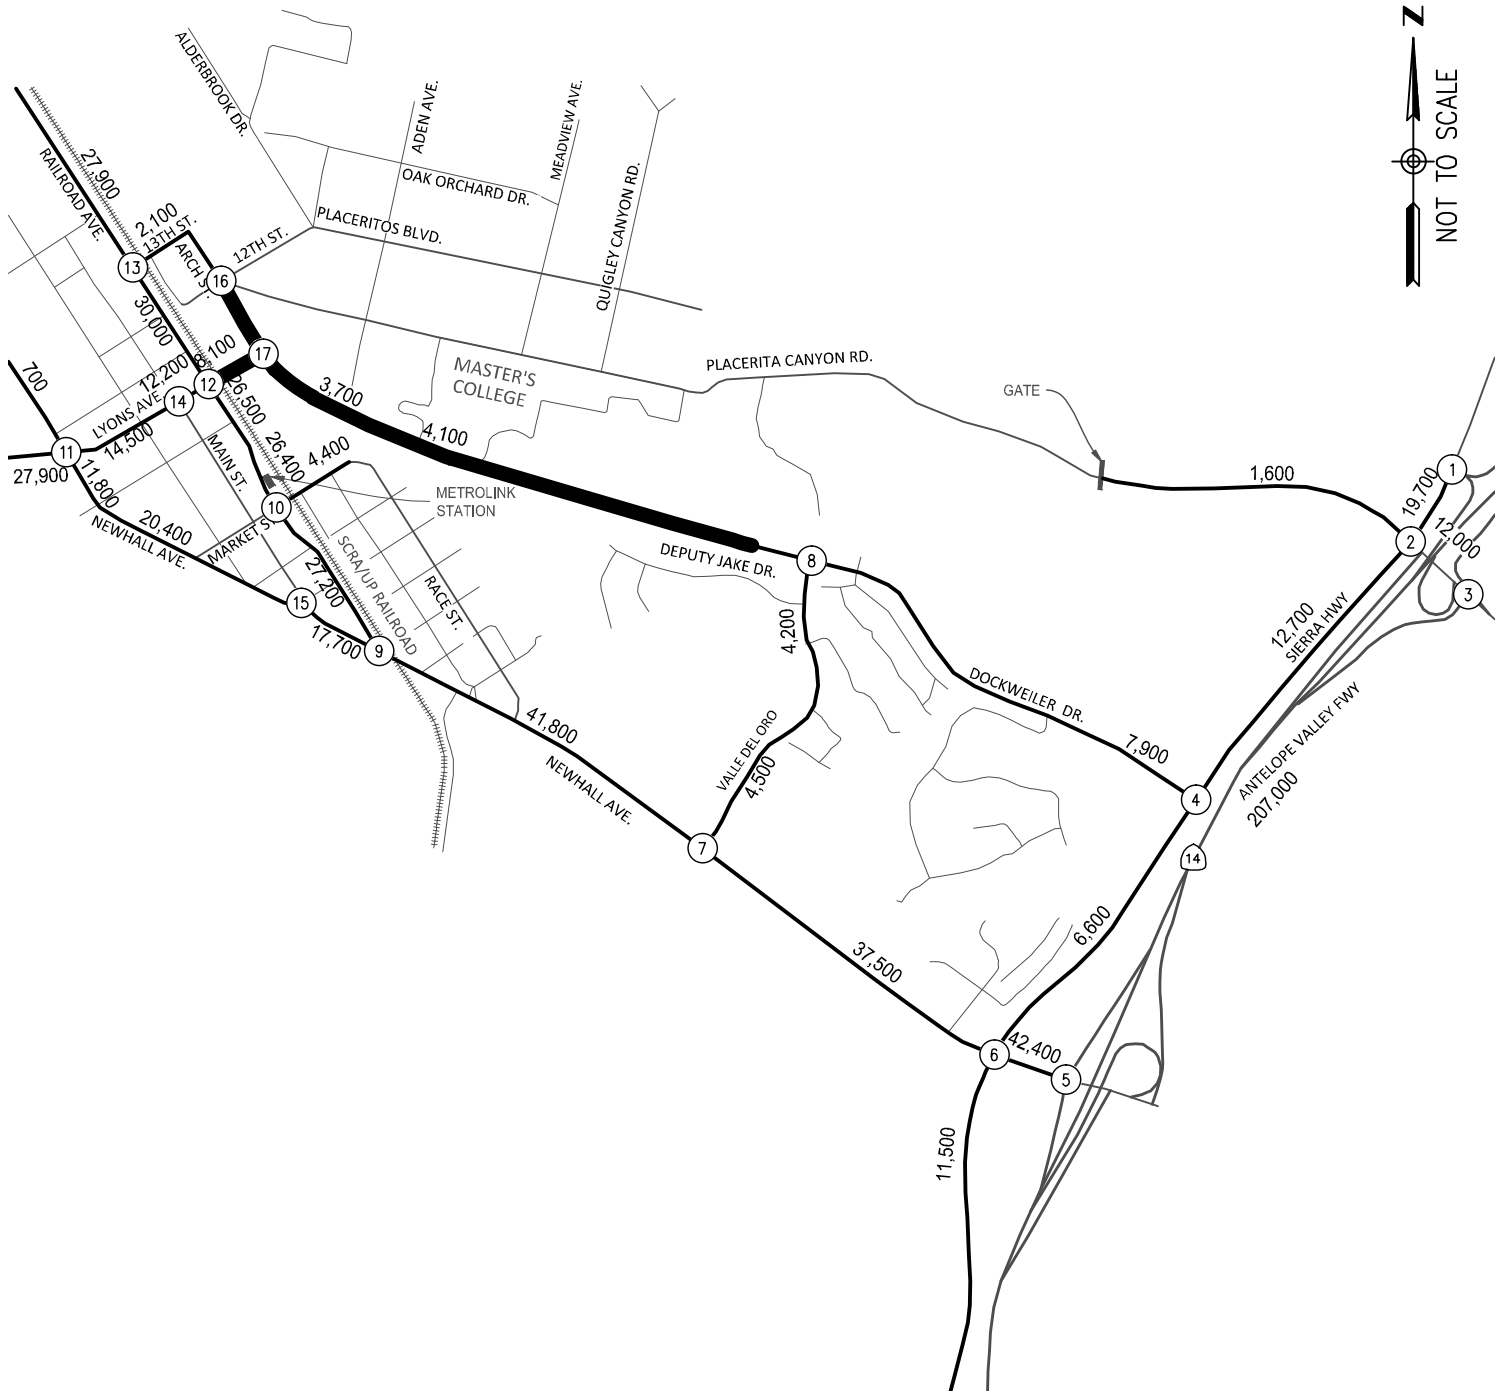


**LEGEND**

Ⓝ - STUDY INTERSECTIONS

**FIGURE 3-7: PROJECT YEAR 2019 ALTERNATIVE 1 - STUDY INTERSECTIONS**

**PROPOSED EXPANSION OF DOCKWEILER DRIVE SANTA CLARITA, CALIFORNIA**



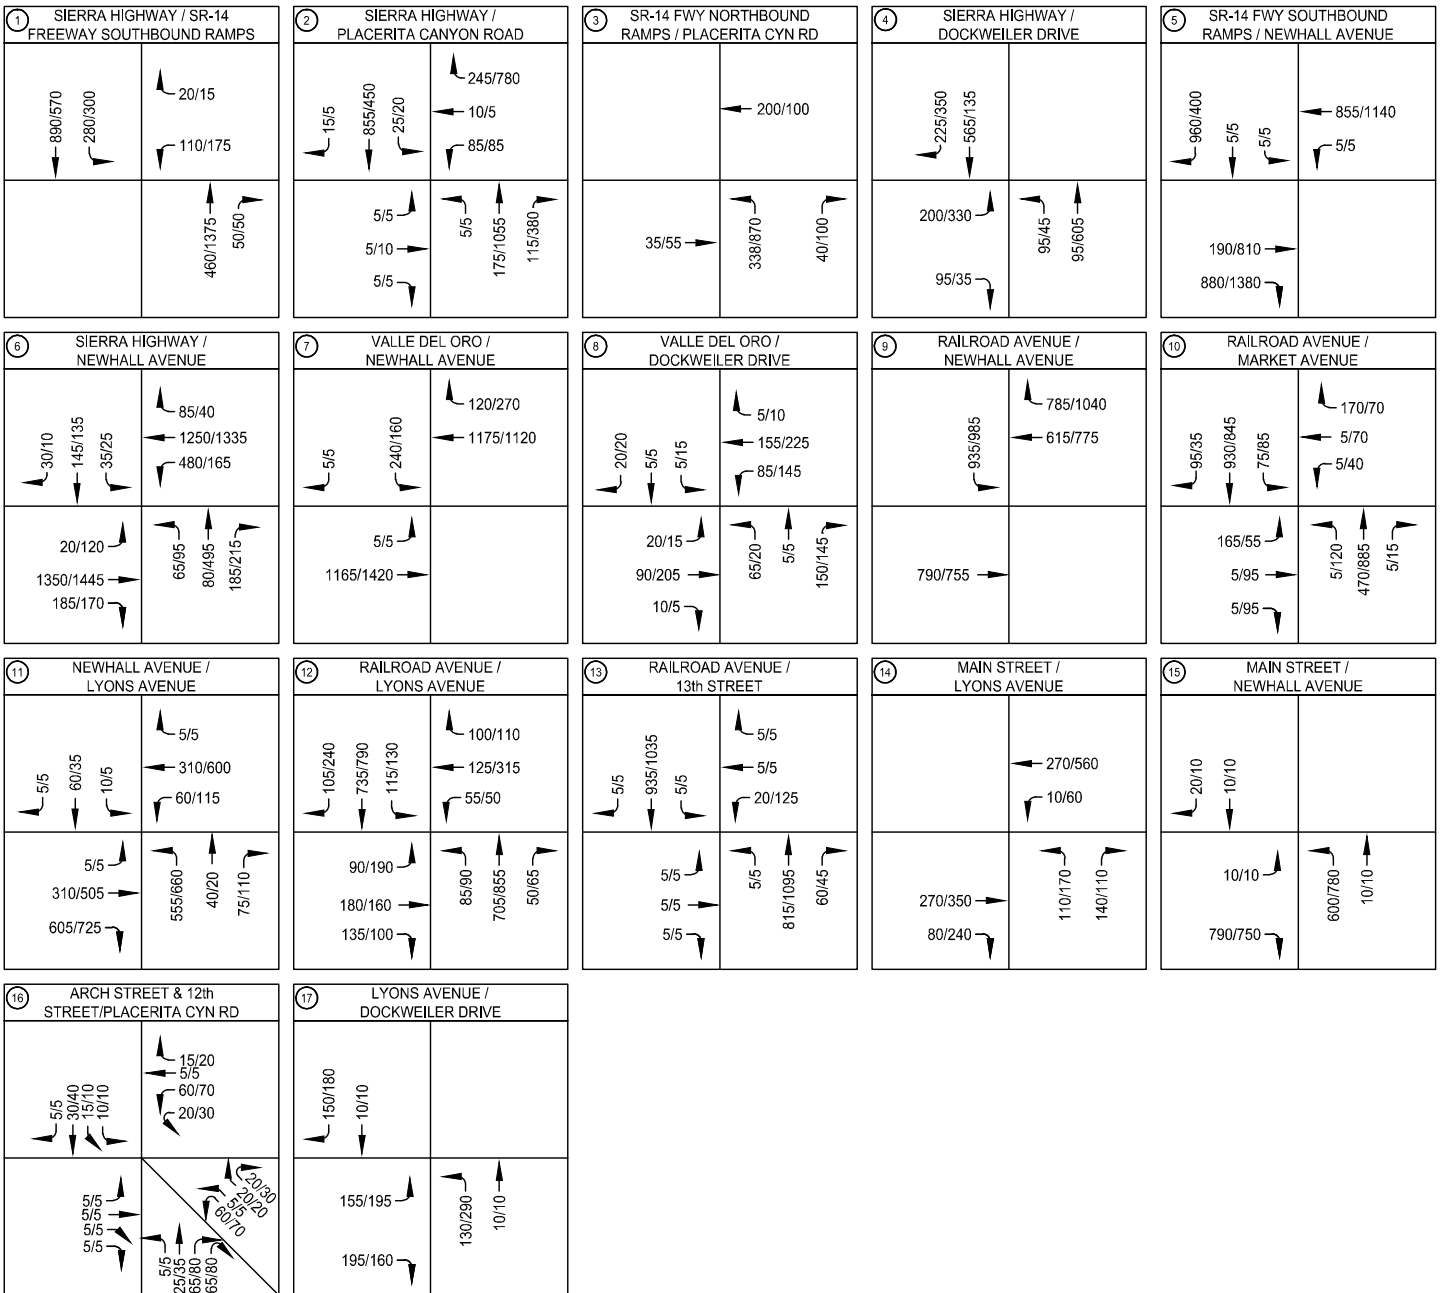

## LEGEND

- # - STUDY INTERSECTIONS
- xx/xx - AM/PM PEAK HOUR VOLUMES

FIGURE 3-8: PROJECT YEAR 2019 ALTERNATIVE 1 - TRAFFIC VOLUMES

PROPOSED EXPANSION OF DOCKWEILER DRIVE  
SANTA CLARITA, CALIFORNIA

The intersections were analyzed using the capacity analysis methodology described in *Chapter 2*. The analysis was conducted with the Project Year 2019 Alternative 1 existing and mitigated study intersection geometrics illustrated in *Figure 3-9*. The LOS for the study intersections presented in *Table 3-3* represents the LOS for the critical movement. This is typically the stop controlled left turn from the minor street.

Table 3-3: Intersection Capacity Analysis – Year 2019 Alternative 1 Condition  
Traffic Impact Analysis – Dockweiler Drive Alignment Project

Intersection		AM		PM	
		Delay (1)	LOS(2)	Delay (1)	LOS(2)
1	Sierra Highway and SR-14 Southbound Ramps (3)	75.1	F	99.99	F
	Mitigation (Traffic Signal and Lane Modification)	16.6	B	22.3	C
2	Sierra Highway and Placerita Canyon Road	26.6	C	100.0	F
	Mitigation (Lane Modification)	22.8	C	48.8	D
3	SR-14 Northbound Ramps and Placerita Canyon Road (3)	12.9	B	99.99	F
	Mitigation (Traffic Signal)	14.8	B	14.7	B
4	Sierra Highway and Dockweiler Drive	15.5	B	12.1	B
5	SR-14 Southbound Ramps and Newhall Avenue (3)	99.99	F	99.99	F
	Mitigation (Traffic Signal and Lane Modification)	5.6	A	5.1	A
6	Sierra Highway and Newhall Avenue	27.2	C	29.4	C
7	Valle Del Oro and Newhall Avenue	15.8	B	12.4	B
8	Valle Del Oro and Dockweiler Drive (3)	12.8	B	15.8	C
9	Railroad Avenue and Newhall Avenue	21.3	C	23.1	C
10	Railroad Avenue and Market Street	26.7	C	18.0	B
11	Newhall Avenue and Lyons Avenue	50.0	D	59.2	E
	Mitigation (Lane Modification)	29.4	C	33.4	C
12	Railroad Avenue and Lyons Avenue	31.3	C	33.7	C
13	Railroad Avenue and 13 <sup>th</sup> Street	11.6	B	14.2	B
14	Main Street and Lyons Avenue	18.4	B	16.4	B
15	Main Street and Newhall Avenue (4)	21.8	C	18.2	C
16	Arch Street/Dockweiler, 12th Street, Placerita Canyon Road (3)	8.5	A	8.9	A
17	Lyons Avenue and Dockweiler Drive	21.7	C	25.4	C

(1) Delay – In Seconds

(2) LOS – Level of Service

(3) Un-Signalized Intersection

(4) Roundabout Intersection

99.99 - Intersection Delay Exceeds Level of Service Standard

Source: **David Evans and Associates, Inc.**


As presented in *Table 3-3* under Year 2019 Alternative 1 Condition, most of the study intersections are anticipated to continue to operate at LOS “E” or better. There are four (4) intersections that are anticipated to operate at LOS “F.” As such, mitigations are necessary to accommodate the anticipated Year 2019 traffic. A summary of the mitigation is presented in Chapter 7 of this report.



### 3.4 Alternative 2 Condition

The Santa Clarita Valley Consolidated Traffic Model (SCVCTM) for Interim Year provided traffic volumes for the Project Year 2019 Alternative 2 Condition. The model plots outlined the distribution of future traffic with the construction of the project Alternative 2. The Project Year 2019 Alternative 2 study intersections are provided in *Figure 3-10*, and the volumes provided in *Figure 3-11*.

The analysis for the intersection of Arch Street/Dockweiler Drive and 12<sup>th</sup> Street/Placerita Canyon Road was conducted as a 5-leg all way stop controlled intersection.

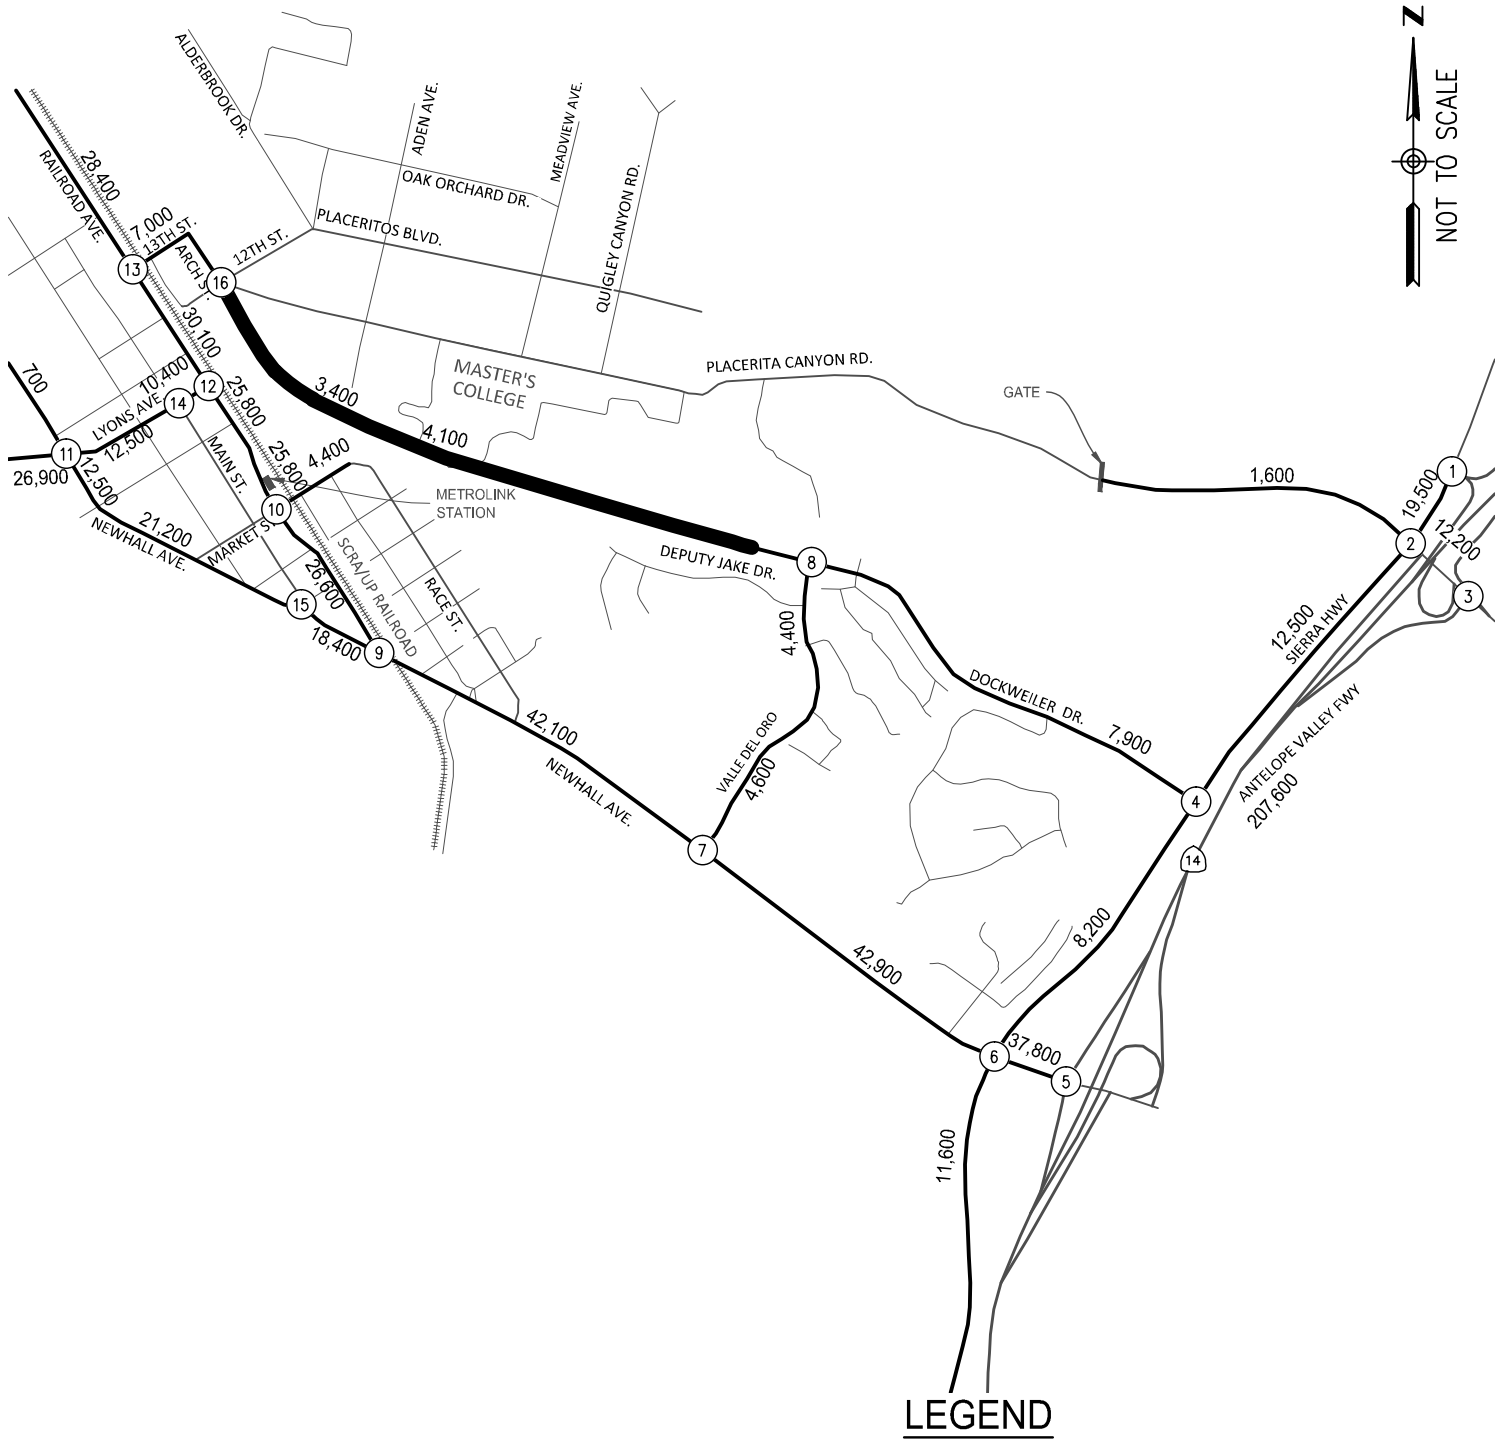


Ⓝ - STUDY INTERSECTIONS

FIGURE 3-10: PROJECT YEAR 2019 ALTERNATIVE 2 - STUDY INTERSECTIONS  
 PROPOSED EXPANSION OF DOCKWEILER DRIVE  
 SANTA CLARITA, CALIFORNIA



Drawing Name: L:\120197\EA\120197.dwg Exhibit 10 Traffic\10 Figures\Figure 3-10.dwg  
 Last Opened: Apr 26, 2016 - 11:52am by: Tom

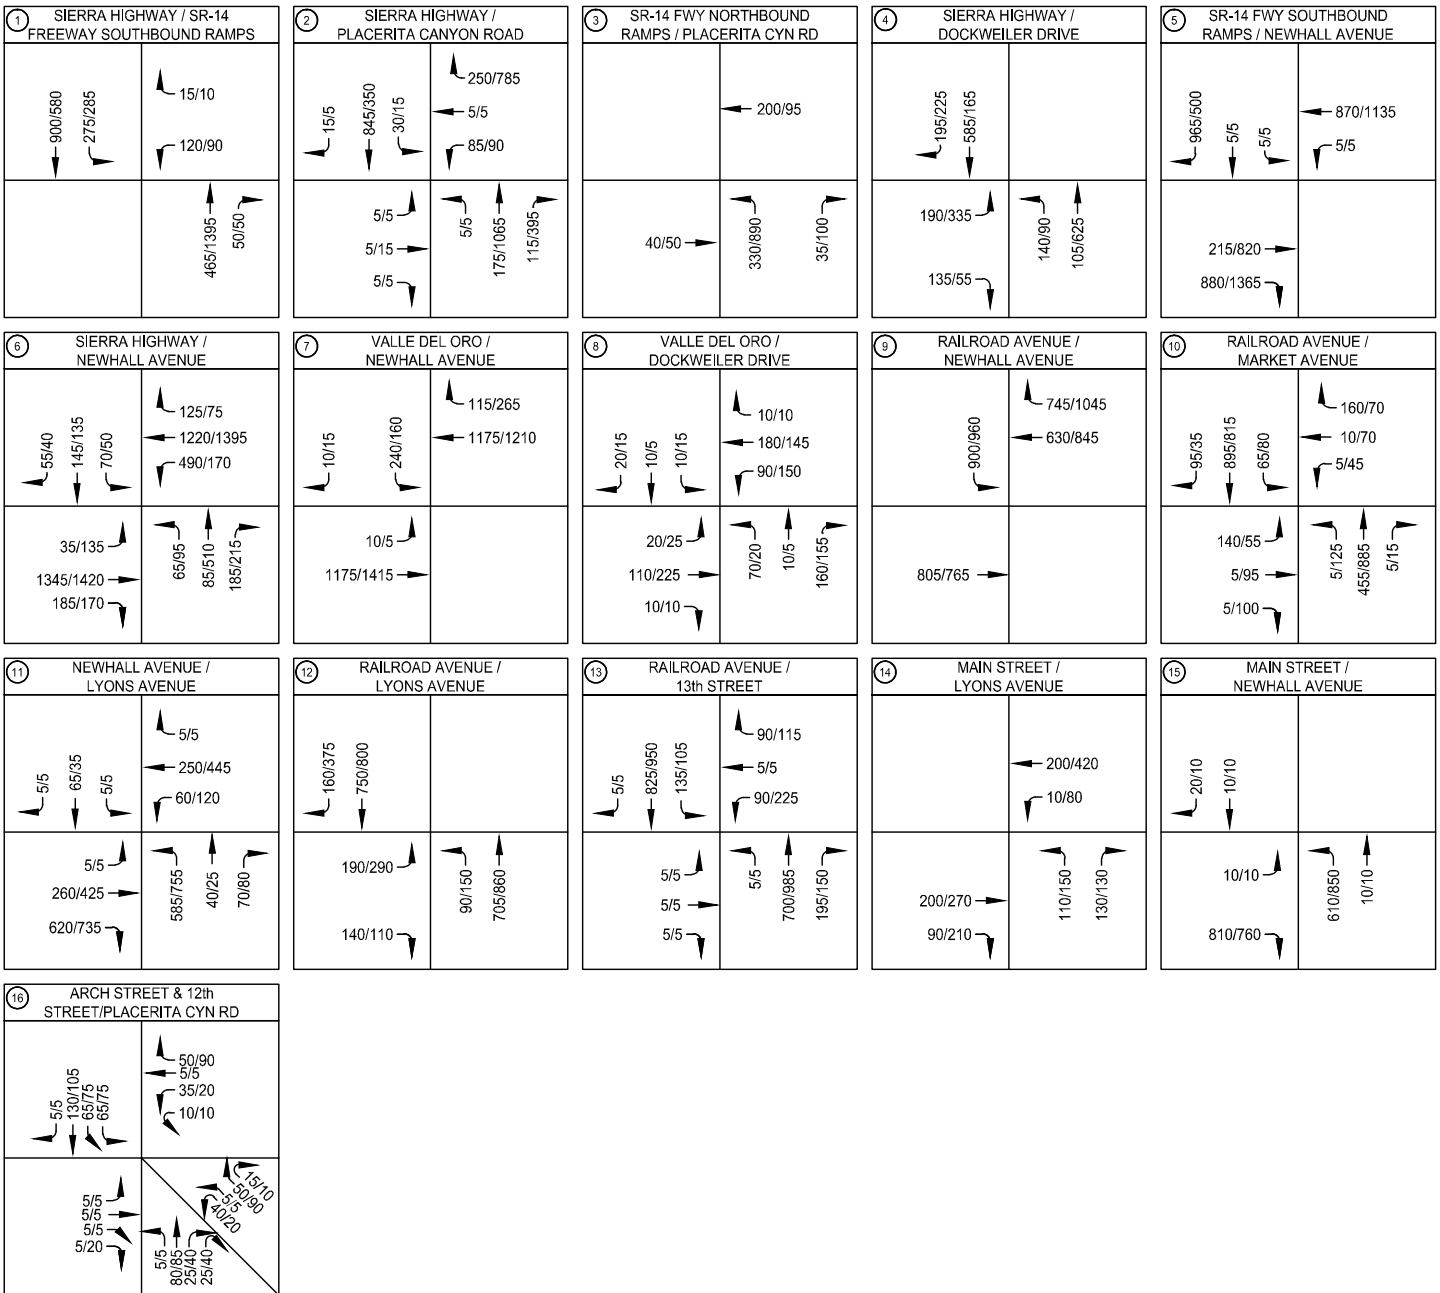

## LEGEND

- # - STUDY INTERSECTIONS
- xx/xx - AM/PM PEAK HOUR VOLUMES

FIGURE 3-11: PROJECT YEAR 2019 ALTERNATIVE  
2 - TRAFFIC VOLUMES

PROPOSED EXPANSION OF  
DOCKWEILER DRIVE  
SANTA CLARITA, CALIFORNIA

The intersections were analyzed using the capacity analysis methodology described in *Chapter 2*. The analysis was conducted with the Project Year 2019 Alternative 2 existing and mitigated study intersection geometrics illustrated in *Figure 3-12*. The LOS for the study intersections presented in *Table 3-4* represents the LOS for the critical movement. This is typically the stop controlled left turn from the minor street.

Table 3-4: Intersection Capacity Analysis – Year 2019 Alternative 2 Condition  
Traffic Impact Analysis – Dockweiler Drive Alignment Project

Intersection		AM		PM	
		Delay (1)	LOS(2)	Delay (1)	LOS(2)
1	Sierra Highway and SR-14 Southbound Ramps (3)	89.7	F	99.99	F
	Mitigation (Traffic Signal and Lane Modification)	16.6	B	21.1	C
2	Sierra Highway and Placerita Canyon Road	23.1	C	99.99	F
	Mitigation (Lane Modification)	23.1	C	51.5	D
3	SR-14 Northbound Ramps and Placerita Canyon Road (3)	12.9	B	99.99	F
	Mitigation (Traffic Signal)	15.0	B	15.1	B
4	Sierra Highway and Dockweiler Drive	17.3	B	13.6	B
5	SR-14 Southbound Ramps and Newhall Avenue (3)	99.99	F	99.99	F
	Mitigation (Traffic Signal and Lane Modification)	5.6	A	5.1	A
6	Sierra Highway and Newhall Avenue	28.5	C	30.9	C
7	Valle Del Oro and Newhall Avenue	15.8	B	12.2	B
8	Valle Del Oro and Dockweiler Drive (3)	14.2	B	17.1	C
9	Railroad Avenue and Newhall Avenue	20.7	C	23.5	C
10	Railroad Avenue and Market Street	26.7	C	18.0	B
11	Newhall Avenue and Lyons Avenue	58.5	E	74.2	E
	Mitigation (Lane Modification)	29.5	C	35.3	D
12	Railroad Avenue and Lyons Avenue	16.7	B	18.5	B
13	Railroad Avenue and 13 <sup>th</sup> Street	18.2	B	24.4	C
14	Main Street and Lyons Avenue	18.3	B	17.6	B
15	Main Street and Newhall Avenue (4)	23.8	C	23.0	C
16	Arch Street/Dockweiler, 12th Street, Placerita Canyon Road (3)	10.1	B	10.5	B

(1) Delay – In Seconds

(2) LOS – Level of Service

(3) Un-Signalized Intersection

(4) Roundabout Intersection

99.99 - Intersection Delay Exceeds Level of Service Standard

Source: **David Evans and Associates, Inc.**

As presented in *Table 3-4* under Year 2019 Alternative 2 Condition, most of the study intersections are anticipated to continue to operate at LOS “E” or better. There are four (4) intersections that are anticipated to operate at LOS “F.” As such, mitigations are necessary to accommodate the anticipated Year 2019 traffic. A summary of the mitigation is presented in Chapter 7 of this report.





#### 4 FUTURE CONDITION – YEAR 2035

The extension of Dockweiler Drive will provide a valley crossing. This roadway is proposed to aid the future traffic growth consistent with the Santa Clarita Valley Consolidated Traffic Model (SCVCTM).

##### ***Future Year 2035 Traffic Analysis***

Future Year 2035 traffic volumes were provided by the City of Santa Clarita using the Santa Clarita Valley Consolidated Traffic Model (SCVCTM) for the Buildout Year. Each alternative was modeled to account for the differing distribution of traffic dependent on the alternative. It is to be noted that Other Area Projects anticipated to be constructed by Year 2035, have been incorporated into the SCVCTM, and account for expected growth.

The buildout includes construction of future roadways Golden Valley Road between Newhall Ranch Road to Valley Center Drive, Magic Mountain Parkway from Railroad Avenue to Via Princessa, and Via Princessa between Claibourne Lane and Sheldon Avenue. This also includes the proposed conceptual development of the North Newhall Specific Plan area an 809 dwelling unit plus an approximate 11 acre commercial land use.

The Future Year 2035 intersection turn movements were primarily taken directly from the Buildout Year SCVCTM specific to the alternative. A few intersection turn movements were determined using existing counts and the link volumes from the Year SCVCTM specific to the alternative. These values were then used in a 'Future Directional Link Volume (NCHRP 255)' calculator to determine Future Year 2035 Turn Movement Volumes. The intersections included were Valle Del Oro and Dockweiler Drive, Railroad Avenue and Market Street, Main Street and Lyons Avenue, Main Street and Newhall Avenue, Arch Street and 12<sup>th</sup> Street/Placerita Canyon Road, Lyons Avenue and Dockweiler Drive, Aden Avenue and Dockweiler Drive, Aden Avenue and Placeritos Boulevard, Aden Avenue and Placerita Canyon Road.

##### 4.1 No- Build Condition

The Santa Clarita Valley Consolidated Traffic Model (SCVCTM) for Build-Out Year provided traffic volumes for the Future Year 2035 Condition. The model plots provided a No-Build Condition outlining the distribution of future traffic without the project. The analysis of No-Build Condition utilizes the traffic volume projections for the City of Santa Clarita's traffic model together with the existing traffic flow data. The traffic projections are based on the General Plan Buildout. The buildout includes construction of future roadways Dockweiler Drive between Railroad Avenue and Val Del Oro, Golden Valley Road between Newhall Ranch Road to Valley Center Drive, Magic Mountain Parkway from Railroad Avenue to Via Princessa, and Via Princessa between Claibourne Lane and Sheldon Avenue. This also includes the proposed conceptual development of the North Newhall Specific Plan area an 809 dwelling unit plus an approximate 11 acre commercial land use.

The Future Year 2035 No-Build study intersections provided in *Figure 4-1*, the volumes provided in *Figure 4-2*.





The intersections were analyzed using the capacity analysis methodology described in *Chapter 2*. The analysis was conducted with the Future Year 2035 No-Build Condition existing and mitigated study intersection geometrics illustrated in *Figure 4-3*. The LOS for the study intersections presented in *Table 4-1* represents the LOS for the critical movement. This is typically the stop controlled left turn from the minor street

Table 4-1: Intersection Capacity Analysis – Year 2035 No-Build Condition  
Traffic Impact Analysis – Dockweiler Drive Alignment Project

Intersection		AM		PM	
		Delay (1)	LOS(2)	Delay (1)	LOS(2)
1	Sierra Highway and SR-14 Southbound Ramps (3)	99.99	F	99.99	F
2	Sierra Highway and Placerita Canyon Road	99.99	F	99.99	F
3	SR-14 Northbound Ramps and Placerita Canyon Road (3)	99.99	F	99.99	F
4	Sierra Highway and Dockweiler Drive	15.2	B	16.2	B
5	SR-14 Southbound Ramps and Newhall Avenue (3)	99.99	F	99.99	F
6	Sierra Highway and Newhall Avenue	60.9	E	99.99	F
7	Valle Del Oro and Newhall Avenue	19.1	B	16.3	B
8	Valle Del Oro and Dockweiler Drive (3)	91.2	F	9.7	A
9	Railroad Avenue and Newhall Avenue	32.0	C	63.1	E
10	Railroad Avenue and Market Street	40.7	D	21.3	C
11	Newhall Avenue and Lyons Avenue	88.3	F	99.99	F
12	Railroad Avenue and Lyons Avenue	18.7	B	17.3	B
13	Railroad Avenue and 13 <sup>th</sup> Street	38.5	D	76.4	E
14	Main Street and Lyons Avenue	17.9	B	19.8	B
15	Main Street and Newhall Avenue (4)	77.6	F	99.99	F
16	Arch Street and 12 <sup>th</sup> Street/Placerita Canyon Road (3)	12.7	B	17.0	C

(1) Delay – In Seconds

(2) LOS – Level of Service



(3) Un-Signalized Intersection

(4) Roundabout Intersection

99.99 - Intersection Delay Exceeds Level of Service Standard

Source: **David Evans and Associates, Inc.**

As presented in *Table 4-1* under Future Year 2035 No-Build Condition, several intersections are anticipated to operate at LOS “F.”

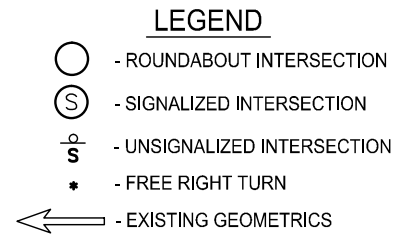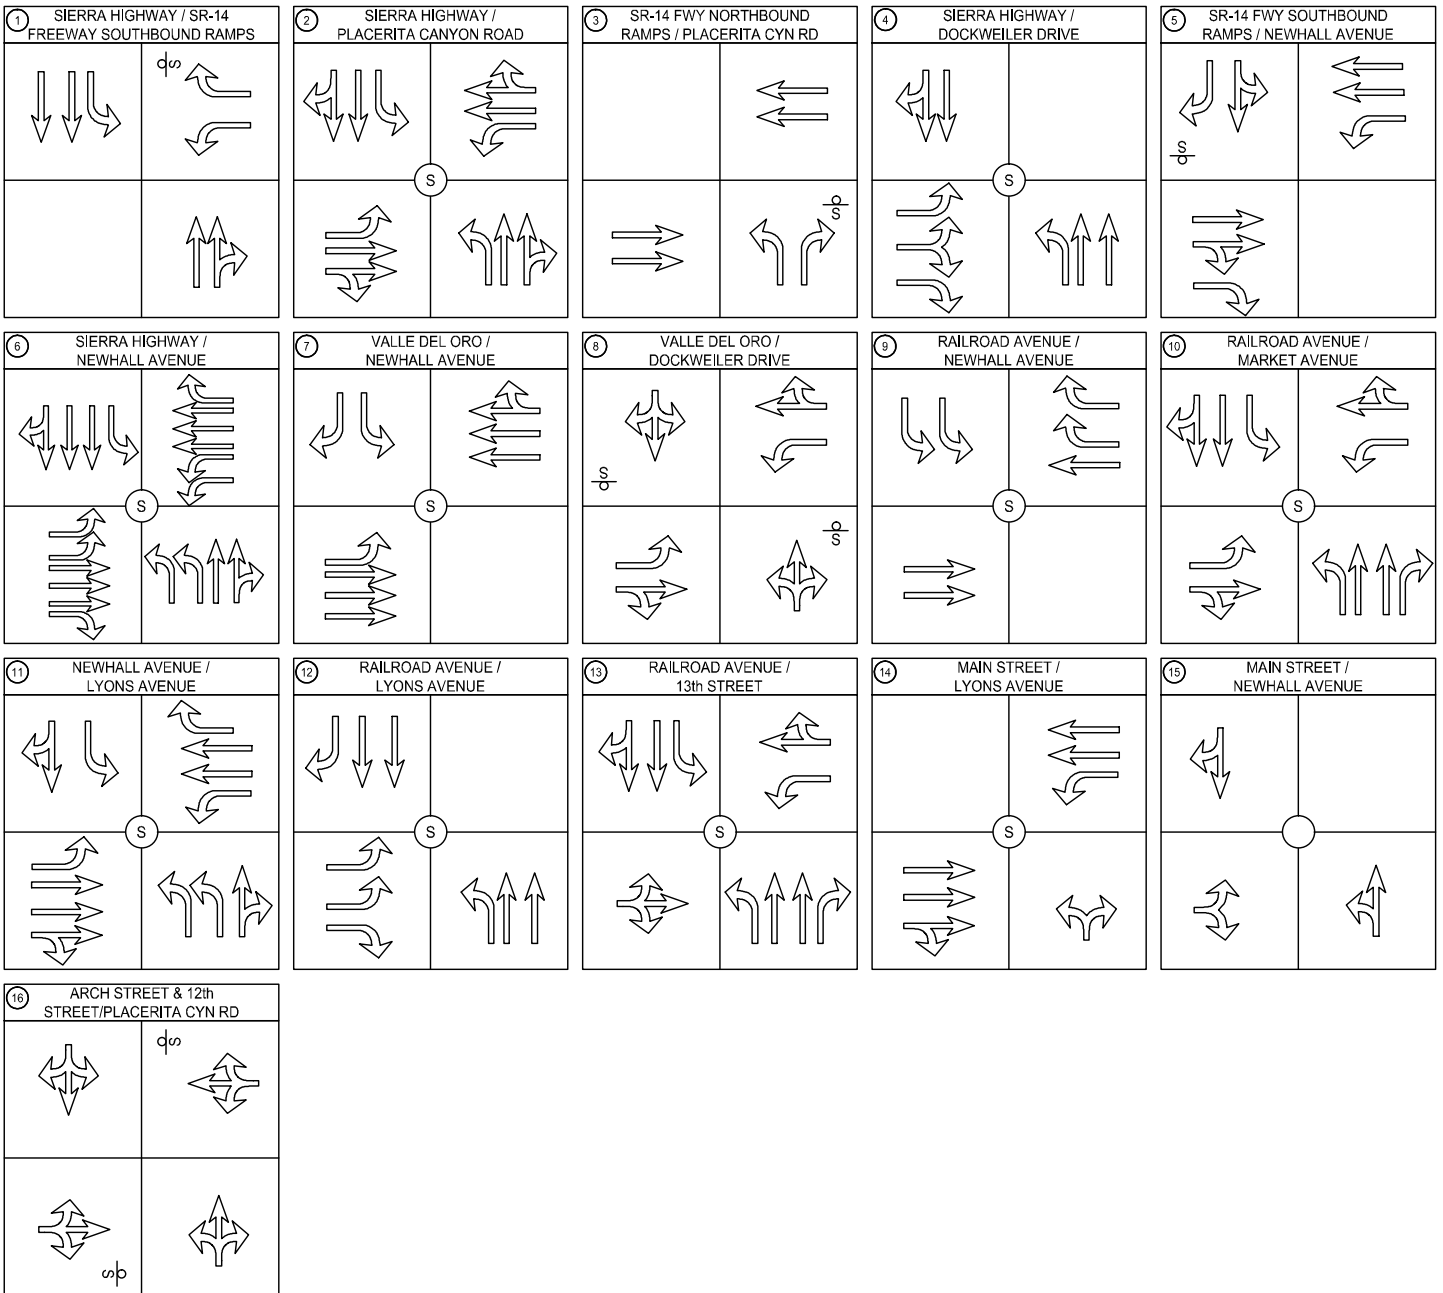

**FIGURE 4-3: FUTURE YEAR 2035 NO BUILD  
 INTERSECTION GEOMETRICS**  
  
**PROPOSED EXPANSION OF  
 DOCKWEILER DRIVE  
 SANTA CLARITA, CALIFORNIA**


#### 4.2 Proposed Project Condition

The Santa Clarita Valley Consolidated Traffic Model (SCVCTM) for Build-Out Year provided traffic volumes for the Future Year 2035 Proposed Project Condition. The model plots outlined the distribution of future traffic with the construction of the Proposed Project. The analysis of Proposed Project utilizes the traffic volume projections for the City of Santa Clarita's traffic model together with the existing traffic flow data. The traffic projections are based on the General Plan Buildout. The buildout includes construction of future roadways Dockweiler Drive between Railroad Avenue and Val Del Oro, Golden Valley Road between Newhall Ranch Road to Valley Center Drive, Magic Mountain Parkway from Railroad Avenue to Via Princessa, and Via Princessa between Claibourne Lane and Sheldon Avenue. This also includes the proposed conceptual development of the North Newhall Specific Plan area an 809 dwelling unit plus an approximate 11 acre commercial land use.

The Future Year 2035 Proposed Project study intersections provided in *Figure 4-4*, the volumes provided in *Figure 4-5*.





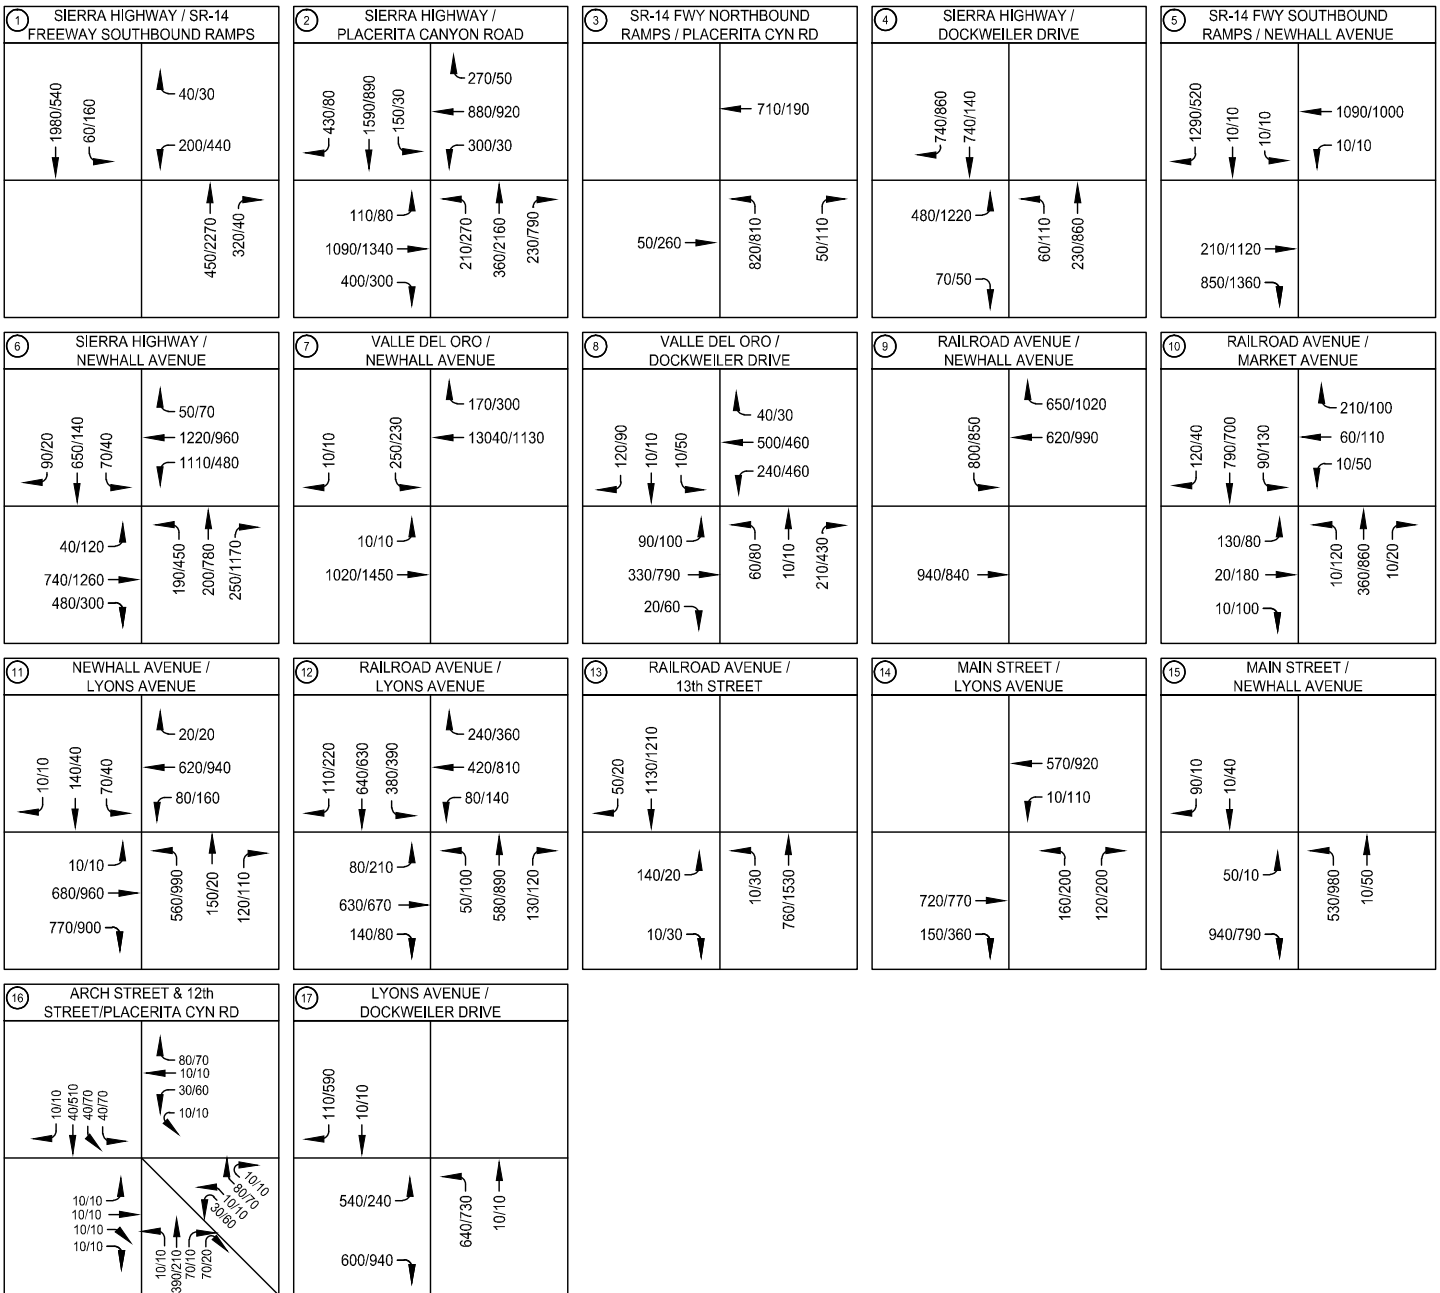

## LEGEND

- # - STUDY INTERSECTIONS
- XX/XX - AM/PM PEAK HOUR VOLUMES

The intersections were analyzed using the capacity analysis methodology described in *Chapter 2*. The analysis was conducted with the Future Year 2035 Proposed Project Condition existing and mitigated study intersection geometrics illustrated in *Figure 4-6*. The LOS for the study intersections presented in *Table 4-2* represents the LOS for the critical movement. This is typically the stop controlled left turn from the minor street.

Table 4-2: Intersection Capacity Analysis – Year 2035 Proposed Project Condition  
Traffic Impact Analysis – Dockweiler Drive Alignment Project

Intersection		AM		PM	
		Delay (1)	LOS(2)	Delay (1)	LOS(2)
1	Sierra Highway and SR-14 Southbound Ramps	15.4	B	59.5	E
2	Sierra Highway and Placerita Canyon Road Mitigation (Lane Modification)	99.99	F	99.99	F
		53.5	D	51.1	D
3	SR-14 Northbound Ramps and Placerita Canyon Road	26.2	C	18.4	B
4	Sierra Highway and Dockweiler Drive	18.9	B	78.0	E
5	SR-14 Southbound Ramps and Newhall Avenue	6.4	A	6.3	A
6	Sierra Highway and Newhall Avenue Mitigation (Lane Modification)	63.1	E	99.99	F
		53.6	D	39.2	D
7	Valle Del Oro and Newhall Avenue	16.1	B	14.6	B
8	Valle Del Oro and Dockweiler Drive (3) Mitigation (Traffic Signal and Lane Modification)	99.99	F	99.99	F
		22.9	C	37.7	D
9	Railroad Avenue and Newhall Avenue	19.1	B	23.9	C
10	Railroad Avenue and Market Street	26.0	C	20.7	C
11	Newhall Avenue and Lyons Avenue	41.4	D	53.5	D
12	Railroad Avenue and Lyons Avenue	42.3	D	54.2	D
13	Railroad Avenue and 13 <sup>th</sup> Street	12.1	B	10.1	B
14	Main Street and Lyons Avenue	16.3	B	17.1	B
15	Main Street and Newhall Avenue (4) Mitigation (Lane Modification)	54.8	F	44.3	E
		10.7	B	8.9	A
16	Arch Street/Dockweiler, 12th Street, Placerita Canyon Road (3)	21.0	C	39.4	E
17	Lyons Avenue and Dockweiler Drive	25.7	C	35.9	D

(1) Delay – In Seconds

(2) LOS – Level of Service



(3) Un-Signalized Intersection

(4) Roundabout Intersection

99.99 - Intersection Delay Exceeds Level of Service Standard

Source: **David Evans and Associates, Inc.**

As presented in *Table 4-2* under Future Year 2035 Proposed Project Condition, most of the study intersections are anticipated to continue to operate at LOS “E” or better. There are four (4) intersections that are anticipated to operate at LOS “F.” As such, mitigations are necessary to accommodate the anticipated Future Year 2035 traffic. A summary of the mitigation is presented in Chapter 7 of this report.

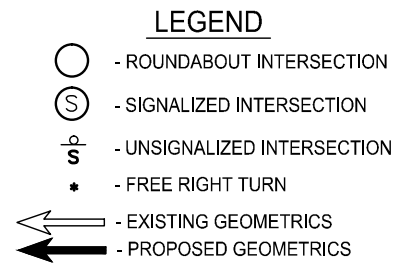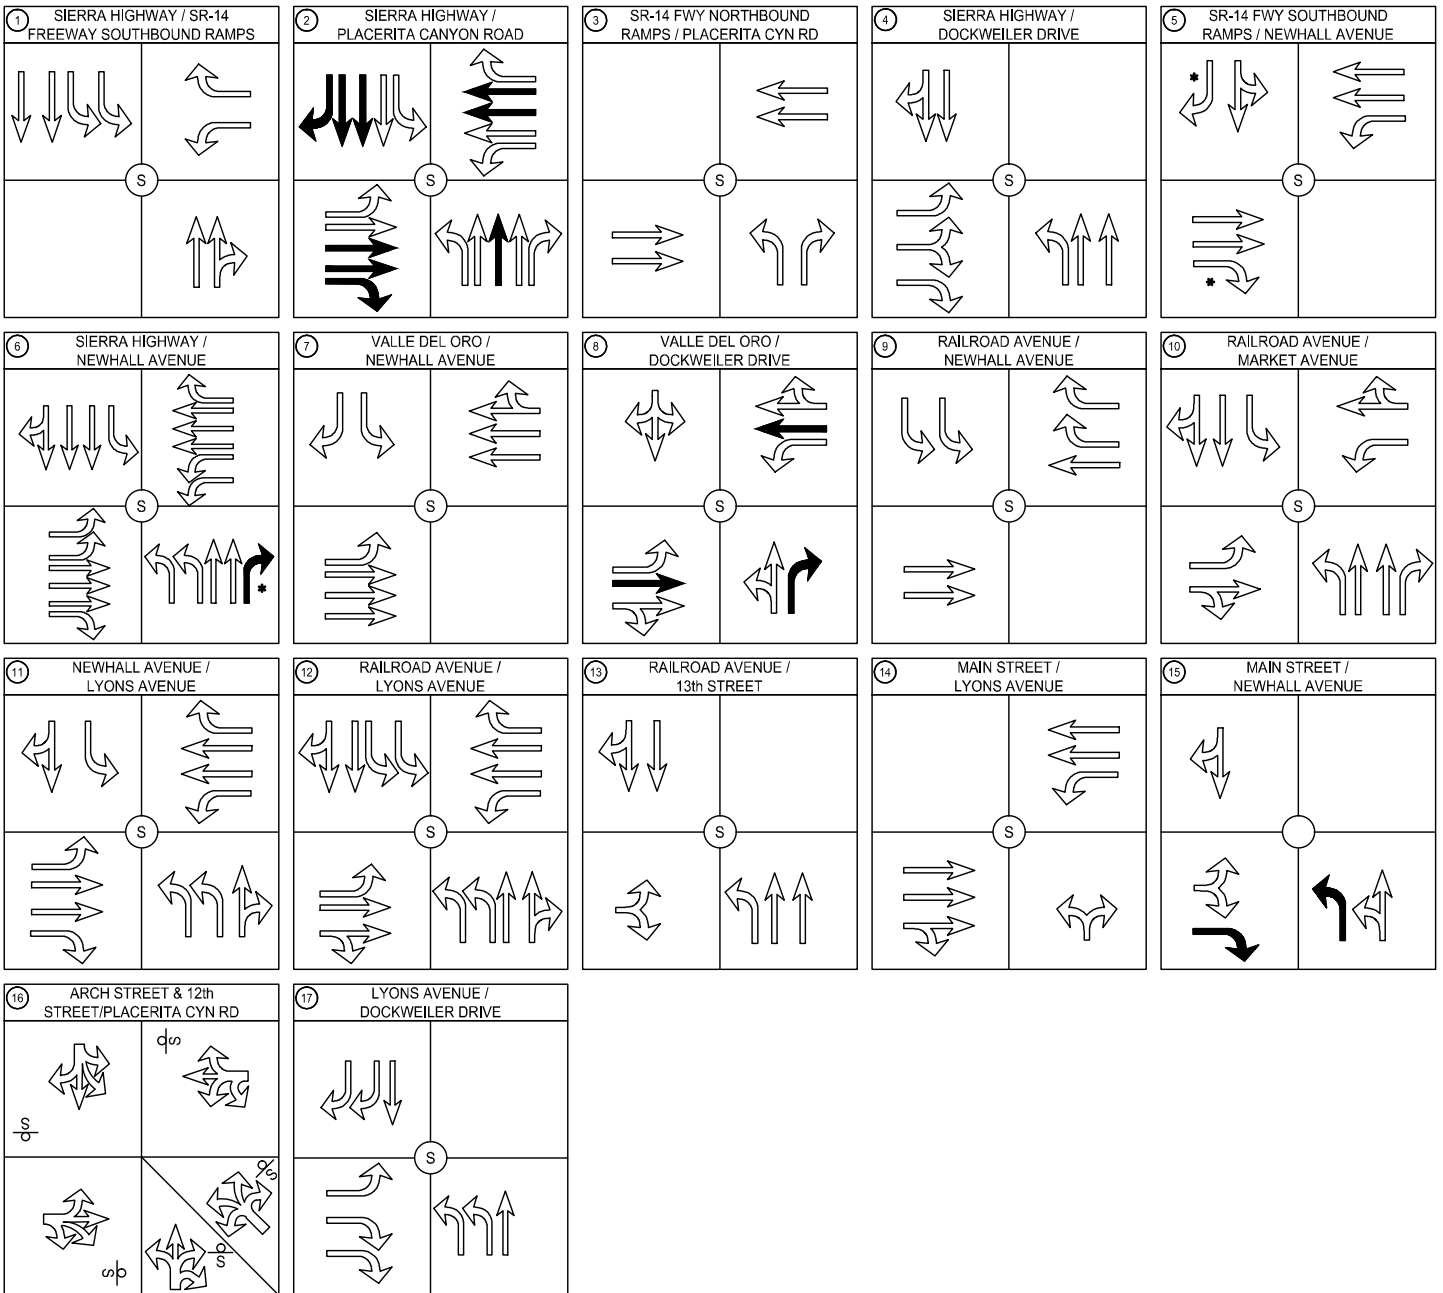


**FIGURE 4-6: FUTURE YEAR 2035  
PROPOSED PROJECT  
INTERSECTION GEOMETRICS**

**PROPOSED EXPANSION OF  
DOCKWEILER DRIVE  
SANTA CLARITA, CALIFORNIA**

### 4.3 Alternative 1 Condition

The Santa Clarita Valley Consolidated Traffic Model (SCVCTM) for Build-Out Year provided traffic volumes for the Future Year 2035 Alternative 1 Condition. The model plots outlined the distribution of future traffic with the construction of the project Alternative 1. The analysis of Alternative 1 utilizes the traffic volume projections for the City of Santa Clarita's traffic model together with the existing traffic flow data. The traffic projections are based on the General Plan Buildout. The buildout includes construction of roadways Dockweiler Drive between Railroad Avenue and Val Del Oro, Golden Valley Road between Newhall Ranch Road to Valley Center Drive, Magic Mountain Parkway from Railroad Avenue to Via Princesa, and Via Princesa between Claibourne Lane and Sheldon Avenue. This also includes the proposed conceptual development of the North Newhall Specific Plan area an 809 dwelling unit plus an approximate 11 acre commercial land use.

The Future Year 2035 Alternative 1 study intersections provided in *Figure 4-7*, the volumes provided in *Figure 4-8*.

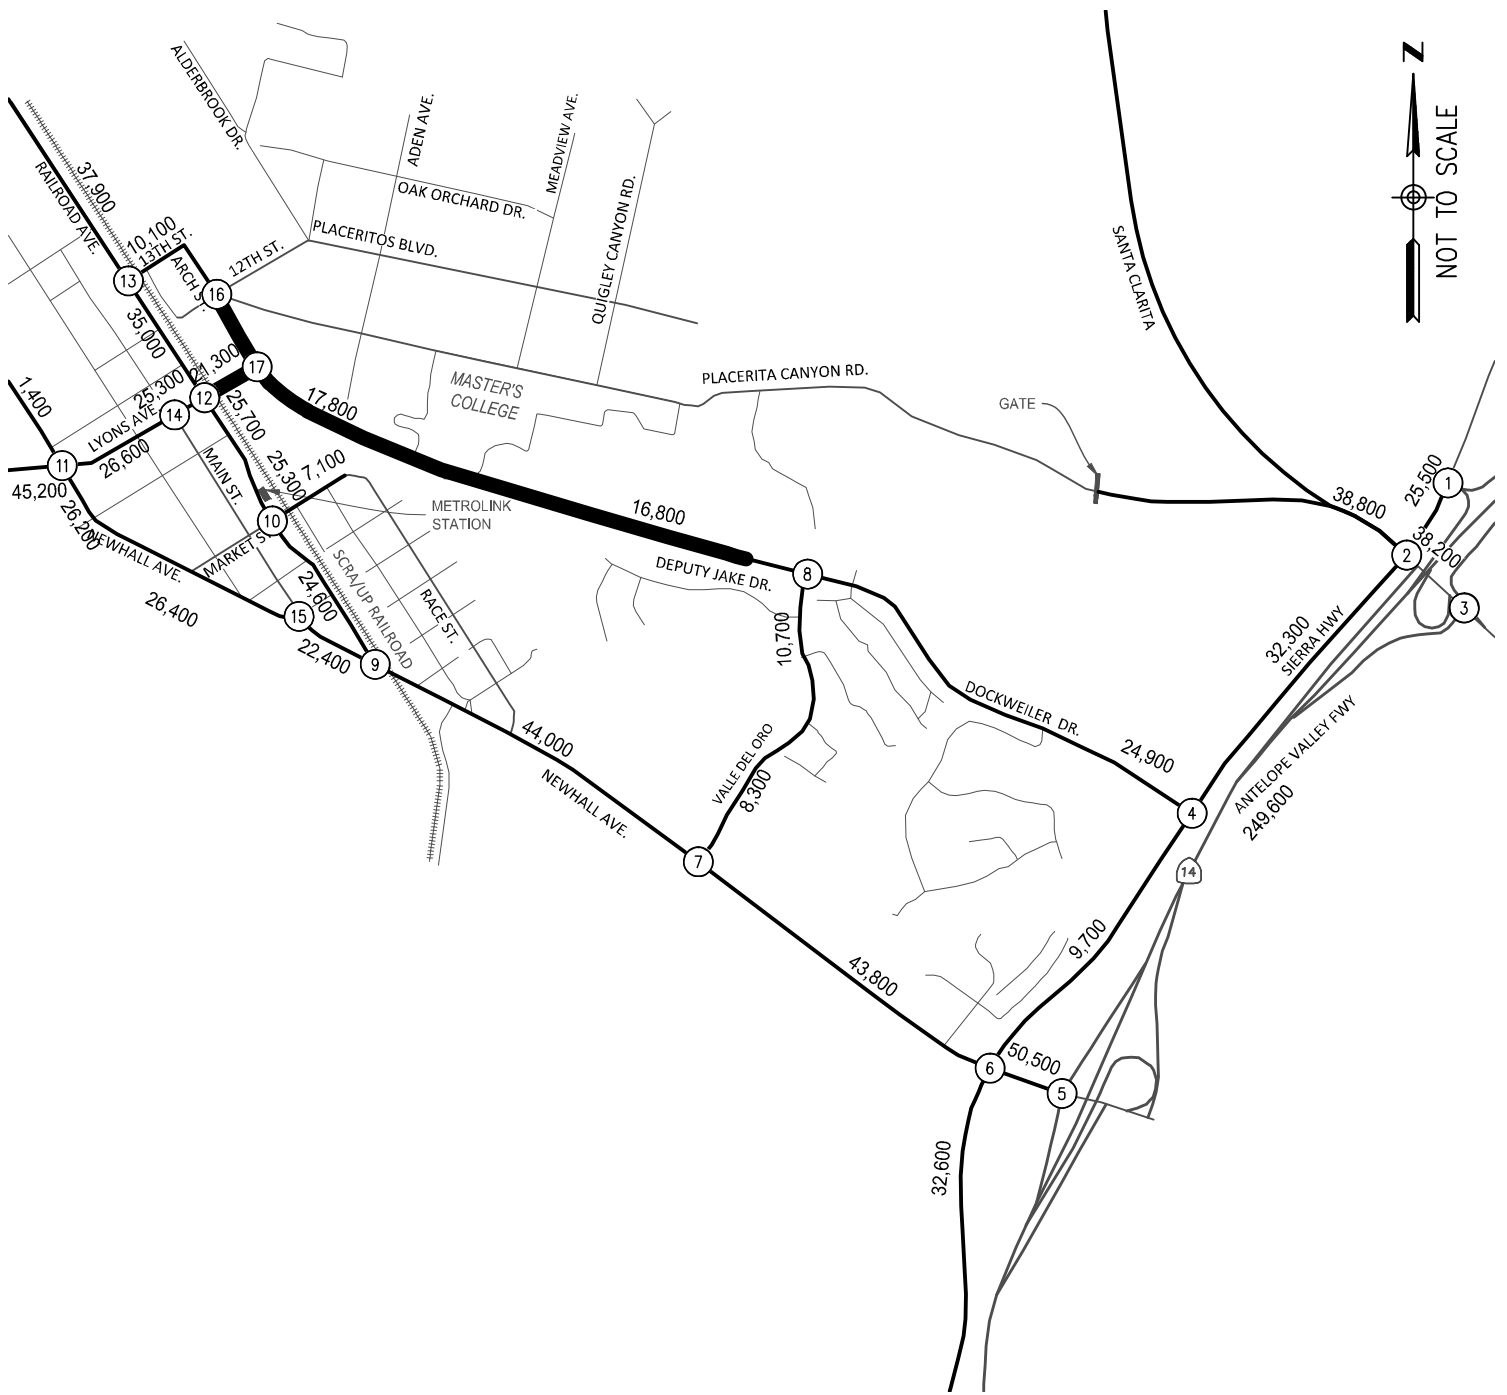


**LEGEND**

Ⓝ - STUDY INTERSECTIONS

**FIGURE 4-7: FUTURE YEAR 2035 ALTERNATIVE 1  
STUDY INTERSECTIONS**

**PROPOSED EXPANSION OF  
DOCKWEILER DRIVE  
SANTA CLARITA, CALIFORNIA**



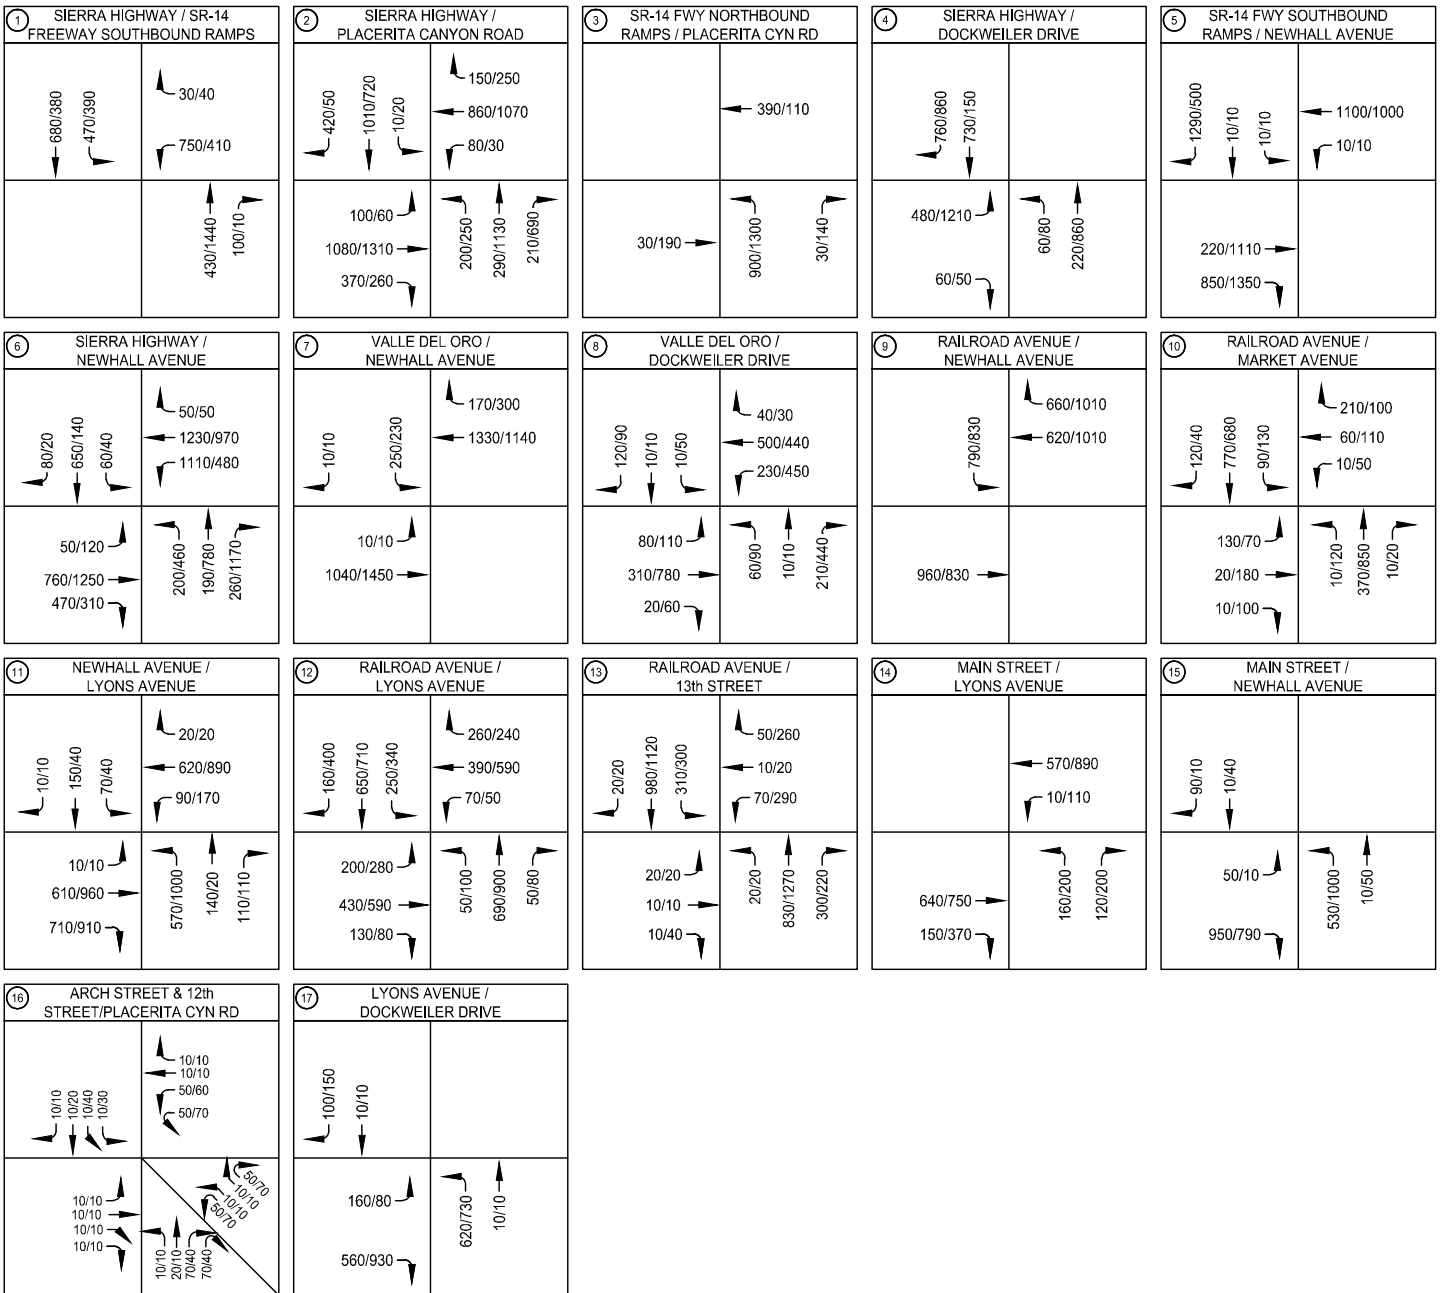

## LEGEND

- # - STUDY INTERSECTIONS
- XX/XX - AM/PM PEAK HOUR VOLUMES

FIGURE 4-8: FUTURE YEAR 2035 ALTERNATIVE 1  
TRAFFIC VOLUMES

PROPOSED EXPANSION OF  
DOCKWEILER DRIVE  
SANTA CLARITA, CALIFORNIA

The intersections were analyzed using the capacity analysis methodology described in *Chapter 2*. The analysis was conducted with the Future Year 2035 Alternative 1 Condition existing and mitigated study intersection geometrics illustrated in *Figure 4-9*. The LOS for the study intersections presented in *Table 4-3* represents the LOS for the critical movement. This is typically the stop controlled left turn from the minor street.

Table 4-3: Intersection Capacity Analysis – Year 2035 Alternative 1 Condition  
Traffic Impact Analysis – Dockweiler Drive Alignment Project

Intersection		AM		PM	
		Delay (1)	LOS(2)	Delay (1)	LOS(2)
1	Sierra Highway and SR-14 Southbound Ramps	41.4	D	44.3	D
2	Sierra Highway and Placerita Canyon Road Mitigation (Lane Modification)	99.99	F	99.99	F
		39.0	D	40.7	D
3	SR-14 Northbound Ramps and Placerita Canyon Road	23.9	C	58.3	E
4	Sierra Highway and Dockweiler Drive	18.8	B	69.5	E
5	SR-14 Southbound Ramps and Newhall Avenue	6.4	A	6.3	A
6	Sierra Highway and Newhall Avenue Mitigation (Lane Modification)	61.8	E	99.99	F
		53.6	D	39.1	D
7	Valle Del Oro and Newhall Avenue	16.0	B	14.7	B
8	Valle Del Oro and Dockweiler Drive (3) Mitigation (Traffic Signal and Lane Modification)	99.99	F	99.99	F
		22.7	C	39.6	D
9	Railroad Avenue and Newhall Avenue	19.0	B	24.1	C
10	Railroad Avenue and Market Street	26.4	C	20.6	C
11	Newhall Avenue and Lyons Avenue	39.5	D	56.1	E
12	Railroad Avenue and Lyons Avenue	37.8	D	47.9	D
13	Railroad Avenue and 13 <sup>th</sup> Street	21.3	C	44.4	D
14	Main Street and Lyons Avenue	16.8	B	17.4	B
		57.5	F	48.2	E
15	Main Street and Newhall Avenue (4) Mitigation (Lane Modification)	10.8	B	9.0	A
		8.3	A	8.6	A
16	Arch Street/Dockweiler, 12th Street, Placerita Canyon Road (3)	8.3	A	8.6	A
17	Lyons Avenue and Dockweiler Drive	21.7	C	25.8	C

(1) Delay – In Seconds

(2) LOS – Level of Service

(3) Un-Signalized Intersection

(4) Roundabout Intersection

99.99 - Intersection Delay Exceeds Level of Service Standard

Source: **David Evans and Associates, Inc.**

As presented in *Table 4-3* under Future Year 2035 Alternative 1 Condition, several intersections are anticipated to operate at LOS “F.” As such, mitigations are necessary to accommodate the anticipated Future Year 2035 traffic. A summary of the mitigation is presented in Chapter 7 of this report.


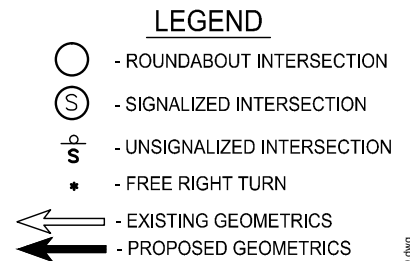


FIGURE 4-9: FUTURE YEAR 2035 ALTERNATIVE 1 INTERSECTION GEOMETRICS

PROPOSED EXPANSION OF DOCKWEILER DRIVE  
SANTA CLARITA, CALIFORNIA



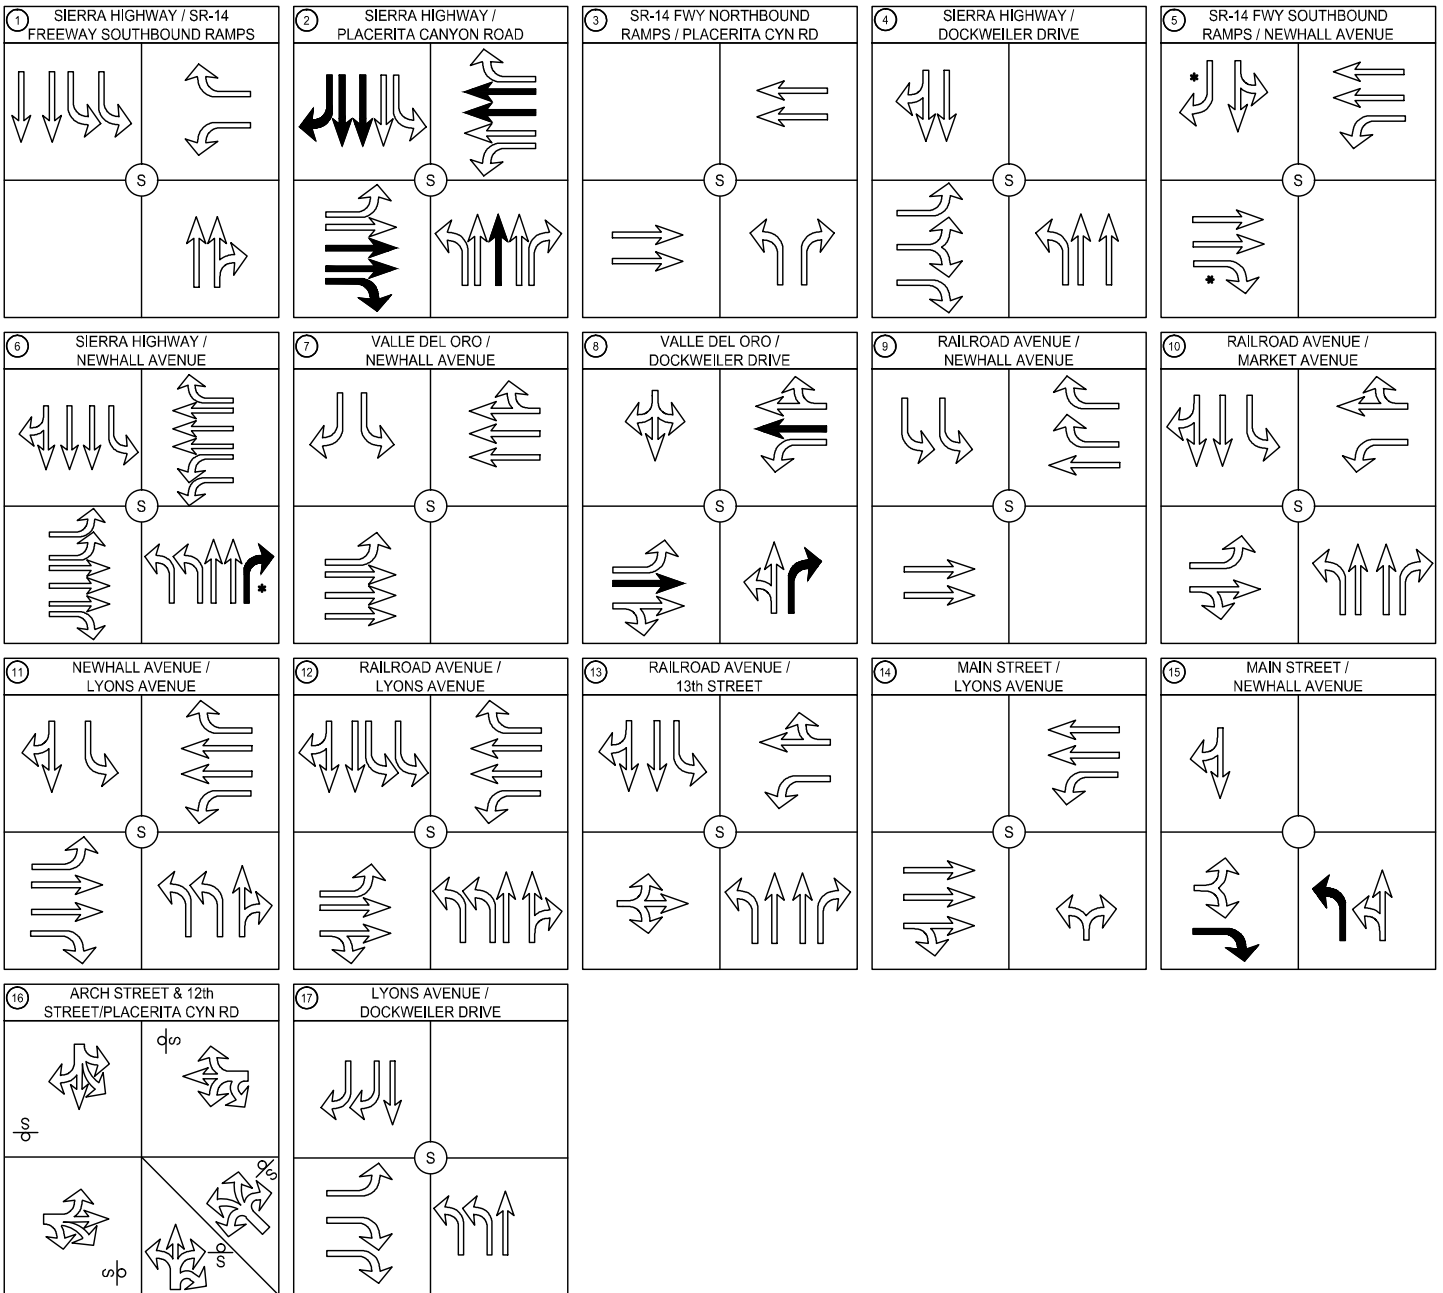

#### 4.4 Alternative 2 Condition

The Santa Clarita Valley Consolidated Traffic Model (SCVCTM) for Interim Year provided traffic volumes for the Future Year 2035 Alternative 2 Condition. The model plots outlined the distribution of future traffic with the construction of the project Alternative 2. The analysis of Alternative 2 utilizes the traffic volume projections for the City of Santa Clarita's traffic model together with the existing traffic flow data. The traffic projections are based on the General Plan Buildout. The buildout includes construction of future roadways Dockweiler Drive between 13<sup>th</sup> Street and Val Del Oro, Golden Valley Road between Newhall Ranch Road to Valley Center Drive, Magic Mountain Parkway from Railroad Avenue to Via Princessa, and Via Princessa between Claibourne Lane and Sheldon Avenue. This also includes the proposed conceptual development of the North Newhall Specific Plan area an 809 dwelling unit plus an approximate 11 acre commercial land use.

The Future Year 2035 Alternative 2 study intersections provided in *Figure 4-10*, the volumes provided in *Figure 4-11*.





The intersections were analyzed using the capacity analysis methodology described in *Chapter 2*. The analysis was conducted with the Future Year 2035 Alternative 2 Condition existing and mitigated study intersection geometrics illustrated in *Figure 4-12*. The LOS for the study intersections presented in *Table 4-4* represents the LOS for the critical movement. This is typically the stop controlled left turn from the minor street.

Table 4-4: Intersection Capacity Analysis – Year 2035 Alternative 2 Condition  
Traffic Impact Analysis – Dockweiler Drive Alignment Project

Intersection		AM		PM	
		Delay (1)	LOS(2)	Delay (1)	LOS(2)
1	Sierra Highway and SR-14 Southbound Ramps	14.2	B	40.6	D
2	Sierra Highway and Placerita Canyon Road Mitigation (Lane Modification)	99.99	F	99.99	F
		51.8	D	43.4	D
3	SR-14 Northbound Ramps and Placerita Canyon Road	26.5	C	18.6	B
4	Sierra Highway and Dockweiler Drive	19.1	B	22.7	C
5	SR-14 Southbound Ramps and Newhall Avenue	6.3	A	6.5	A
6	Sierra Highway and Newhall Avenue Mitigation (Lane Modification)	61.6	E	99.99	F
		54.4	D	44.2	D
7	Valle Del Oro and Newhall Avenue	16.2	B	14.1	B
8	Valle Del Oro and Dockweiler Drive (3) Mitigation (Traffic Signal and Lane Modification)	99.99	F	17.3	C
		27.0	C	25.1	C
9	Railroad Avenue and Newhall Avenue	23.8	C	36.4	D
10	Railroad Avenue and Market Street	27.8	C	21.4	C
11	Newhall Avenue and Lyons Avenue	71.4	E	67.9	E
12	Railroad Avenue and Lyons Avenue	18.8	B	17.7	B
13	Railroad Avenue and 13 <sup>th</sup> Street Mitigation (Lane Modification)	50.5	D	99.99	F
		55	D	43.4	D
14	Main Street and Lyons Avenue	17.2	B	19.3	B
15	Main Street and Newhall Avenue (4) Mitigation (Lane Modification)	63.9	F	99.99	F
		9.8	A	11.1	B
16	Arch Street/Dockweiler, 12th Street, Placerita Canyon Road (3)	18.4	C	39.1	E

(1) Delay – In Seconds

(2) LOS – Level of Service



(3) Un-Signalized Intersection

(4) Roundabout Intersection

99.99 - Intersection Delay Exceeds Level of Service Standard

Source: **David Evans and Associates, Inc.**

As presented in *Table 4-4* under Future Year 2035 Alternative 2 Condition, several intersections are anticipated to operate at LOS “F.” As such, mitigations are necessary to accommodate the anticipated Future Year 2035 traffic. A summary of the mitigation is presented in Chapter 7 of this report.

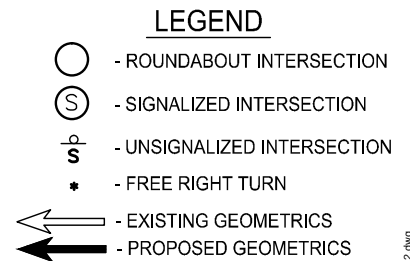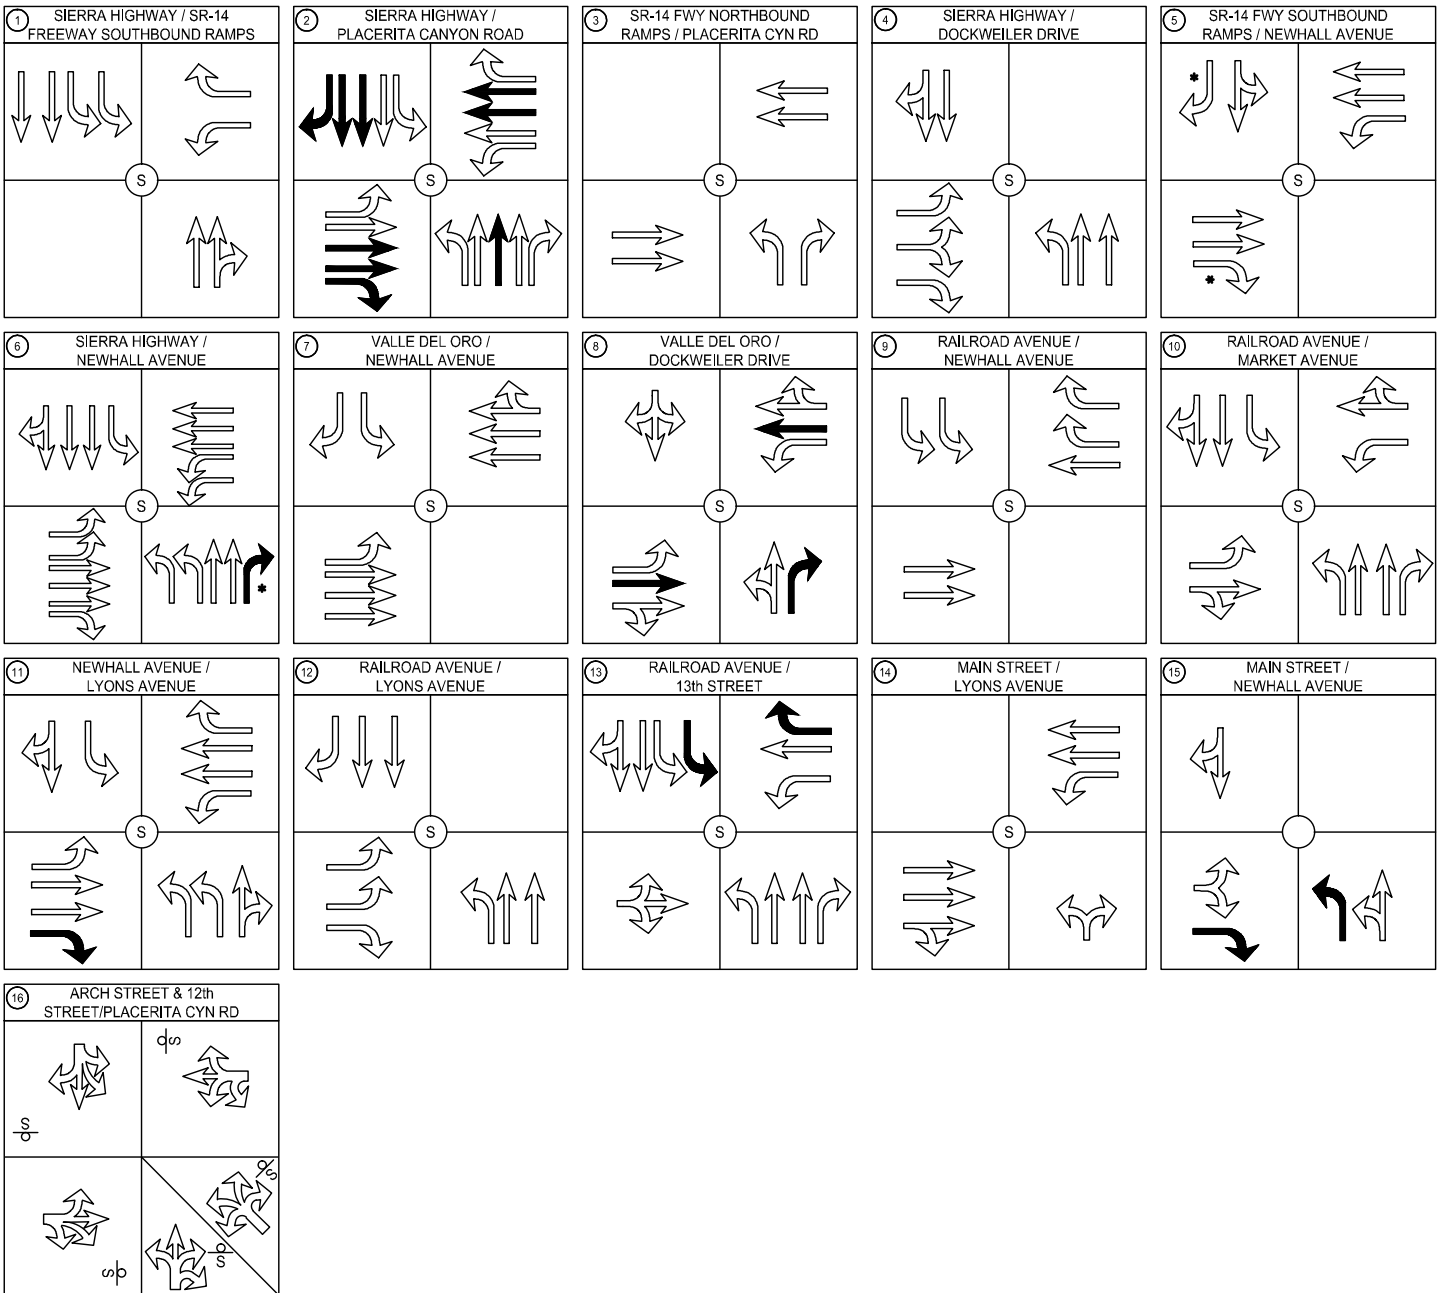

**FIGURE 4-12: FUTURE YEAR 2035 ALTERNATIVE  
 2 - INTERSECTION GEOMETRICS**  
  
**PROPOSED EXPANSION OF  
 DOCKWEILER DRIVE  
 SANTA CLARITA, CALIFORNIA**



## 5 RAILROAD CROSSING ANALYSIS

The existing Union Pacific/Metrolink rail line currently extends through the City of Santa Clarita, and is shared by both freight (Union Pacific) and passenger (Metrolink Antelope Valley line) trains. The nearest Metrolink train station to the proposed project is the Jan Heidt Newhall station located at Railroad Avenue and Market Street, approximately 0.25 mile south of Lyons Avenue. Currently the rail line serves approximately eight (8) freight trains per day with thirty (30) Metrolink commuter trains per weekday; twelve (12) on Saturday and six (6) trains Sunday. Passenger service from the Newhall station southbound to Los Angeles is provided by fourteen (14) trains per weekday starting at approximately 5:00 AM and ending at 7:30 PM. Passenger service northbound to Lancaster from the Newhall station is also provided by nine (9) trains starting at 7:00 AM until approximately 10:00 PM.

Traffic Counts were compiled for the existing railroad crossings at 13<sup>th</sup> Street, Market Street, and Newhall Avenue. AM and PM peak hour traffic counts included the existing vehicles, pedestrians, and bicycle volumes. *Table 5-1* presents the existing traffic counts.

For a comparison of the three Dockweiler Drive extension alternatives, Daily and AM and PM Peak hour traffic volumes were compiled for the Year 2019 and 2035 conditions as presented in *Table 5-2* and *Table 5-3* respectively.

Table 5-1: Railroad Crossing Analysis – Existing Condition  
Traffic Impact Analysis – Dockweiler Drive Extension

Existing Condition	1	2	3	4	Total
	13 <sup>th</sup> Street	Lyons Avenue	Market Street	Newhall Avenue	
ADT <sup>1</sup>	9,200	N / A <sup>5</sup>	4,000	43,350	<b>56,550</b>
AUTO <sup>2</sup> (AM)	555		320	3140	<b>4,015</b>
AUTO <sup>2</sup> (PM)	665		485	3925	<b>5,075</b>
PED <sup>3</sup> (AM)	6	N / A <sup>5</sup>	47	11	<b>64</b>
PED <sup>3</sup> (PM)	5		59	15	<b>79</b>
Bicycles <sup>4</sup> (AM)	3	N / A <sup>5</sup>	5	3	<b>11</b>
Bicycles <sup>4</sup> (PM)	8		15	4	<b>27</b>

(-) - Data not available

(1) ADT – Average Daily Traffic

(2) AUTO – Peak Hour Auto Traffic (Both Directions)

(3) PED – Peak Hour Pedestrian Traffic

(4) Bicycles – Peak Hour Bicycle Traffic

(5) N/A – Not Applicable Future Railroad Crossing

Source: **David Evans and Associates, Inc.**

Table 5-2: Railroad Crossing Analysis – Project Year 2019 Condition  
Traffic Impact Analysis – Dockweiler Drive Extension

Year 2019		1	2	3	4	Total
		13 <sup>th</sup> Street	Lyons Avenue	Market Street	Newhall Avenue	
No Build	ADT <sup>1</sup>	10,850	N / A <sup>3</sup>	4,410	47,550	<b>62,810</b>
	AM <sup>2</sup>	955		185	3,370	<b>4,510</b>
	PM <sup>2</sup>	1,050		375	3,860	<b>5,285</b>
Proposed Project	ADT <sup>1</sup>	N / A <sup>3</sup>	8,060	4,390	44,790	<b>57,240</b>
	AM <sup>2</sup>		620	185	3,115	<b>3,920</b>
	PM <sup>2</sup>		840	370	3,580	<b>4,790</b>
Alternative 1	ADT <sup>1</sup>	2,130	8,110	4,430	44,910	<b>59,580</b>
	AM <sup>2</sup>	105	625	190	3,130	<b>4,050</b>
	PM <sup>2</sup>	190	840	375	3,560	<b>4,965</b>
Alternative 2	ADT <sup>1</sup>	6,990	N / A <sup>3</sup>	4,420	45,010	<b>56,420</b>
	AM <sup>2</sup>	530		180	3,085	<b>3,795</b>
	PM <sup>2</sup>	650		380	3,615	<b>4,645</b>

(1) ADT – Average Daily Traffic

(2) AUTO – Peak Hour Auto Traffic (Both Directions)

(3) N/A – Railroad Crossing Not Applicable to the Condition

Source: **David Evans and Associates, Inc.**

As presented in *Table 5-2* under Project Year 2019, the total average daily traffic is anticipated to be highest for the No Build Condition.

Table 5-3: Railroad Crossing Analysis – Future Year 2035 Condition  
Traffic Impact Analysis – Dockweiler Drive Extension

Year 2035		1	2	3	4	Total
		13 <sup>th</sup> Street	Lyons Avenue	Market Street	Newhall Avenue	
No Build	ADT <sup>1</sup>	16,940	N / A <sup>3</sup>	6,920	56,300	<b>80,160</b>
	AM <sup>2</sup>	1,170		325	3,735	<b>5,230</b>
	PM <sup>2</sup>	1,525		575	4,605	<b>6,705</b>
Proposed Project	ADT <sup>1</sup>	N / A <sup>3</sup>	28,870	7,050	47,100	<b>83,020</b>
	AM <sup>2</sup>		1880	330	3,015	<b>5,225</b>
	PM <sup>2</sup>		2495	590	3,695	<b>6,780</b>
Alternative 1	ADT <sup>1</sup>	10,150	21,270	7,060	47,050	<b>85,530</b>
	AM <sup>2</sup>	625	1435	320	3,025	<b>5,405</b>
	PM <sup>2</sup>	865	1885	600	3,680	<b>7,030</b>
Alternative 2	ADT <sup>1</sup>	17,670	N / A <sup>3</sup>	6,980	52,140	<b>76,790</b>
	AM <sup>2</sup>	1295		330	3370	<b>4,995</b>
	PM <sup>2</sup>	1585		580	4165	<b>6,330</b>

(1) ADT – Average Daily Traffic

(2) AUTO – Peak Hour Auto Traffic (Both Directions)

(3) N/A – Railroad Crossing Not Applicable to the Condition

Source: **David Evans and Associates, Inc.**

As presented in *Table 5-3* under Future Year 2035, the total average daily traffic is anticipated to be highest for the Alternative 1 Condition.

## 6 BICYCLE AND PEDESTRIAN FACILITIES

The California State Government Code outlines that a city must develop a Circulation Plan included in its General Plan that shall include the general location and extent of existing and proposed major thoroughfares, transportation routes, terminals and other local public utilities and facilities. Furthermore the City and County must coordinate with regional transportation plan. Consideration to said code the City of Santa Clarita utilized regional plans affecting the Santa Clarita Valley. Those regional plans included California Department of Transportation (Caltrans); the Regional Mobility Plan prepared by the Southern California Association of Governments (SCAG); the Los Angeles Metropolitan Transportation Authority's (MTA or Metro) Congestion Management Program and bicycle way strategic plan; Santa Clarita Transit's Transportation Development Plan (TDP); and Los Angeles County's Airport Land Use Plan.

The Santa Clarita Valley's circulation system provides vital connections linking neighborhoods, services, and employment centers throughout the community and the region. A comprehensive transportation network of roadways, multi-use trails and bicycle paths, bus transit, and commuter rail provides mobility options to Valley residents and businesses. Planning for the ultimate location and capacity of circulation improvements will also enhance economic strength and quality of life in the Valley.

Consideration to the Santa Clarita Valley's continued development of efficient, cost-effective and comprehensive transportation systems that are consistent with regional plans, and local needs. The Circulation Plan identifies and promotes a variety of techniques for improving mobility that go beyond planning for construction of new streets and highways. A major component in the development of the Santa Clarita Valley is the inclusion of alternative travel modes and support facilities. These facilities increase efficiency and capacity of existing systems, by promoting mixed-use development near transit facilities. Bicycle lanes and accessibility to bicycle paths are fundamental to a comprehensive transportation network. The Santa Clarita Valley's Bicycle and Pedestrian Facilities is provided in *Figure 6-1*.

As illustrated in *Figure 6-1*, Potential Bike Lane connectors are proposed from Dockweiler Drive to connect to the Proposed Class I Bike Path along Railroad Avenue and the Proposed Class I Bike Path along Railroad Avenue.





## 7 PROJECT IMPACT, MITIGATION, AND SUMMARY

The following is an outline of the recommended traffic mitigation measures for the Proposed Project and each of the alternatives.

### 7.1 Proposed Project

#### ***Year 2019 Project Mitigations***

1. Dockweiler Drive extension: Construct to full Secondary Highway Pavement width, from Aden Avenue to west of Valle Del Oro, providing two lanes eastbound (uphill) and one lane westbound (downhill), as necessary. May be striped for parking lane on both sides of roadway in interim condition. Class II Bike lanes and Pedestrian Sidewalks to be provided.
2. Railroad Avenue (North-South) and Lyons Avenue (East-West): Construct the railroad crossing and improve the intersection. The intersection improvements will include widening the northbound direction to accommodate an additional left turn lane and convert a through lane to a shared through-right lane and southbound direction to accommodate an additional left turn lane and convert the right turn lane to a shared through-right turn lane. The north and southbound directions will include two left turn lanes, a through lane, and a shared through-right turn lane. The eastbound direction will provide a left turn lane, a through lane, and a shared through-right turn lane. The westbound direction will provide a left turn lane, two through lanes and a right turn lane.
3. Arch Street (north leg) / Dockweiler Drive (south leg) / 12<sup>th</sup> Street (east and west legs) / Placerita Canyon Road (southeast leg): Convert intersection to a 5-leg all way stop controlled intersection including Dockweiler Drive as the 5<sup>th</sup> leg. Arch Street will include a shared left-through-right lane accommodating left turning movements to the west leg (12<sup>th</sup> Street) and Placerita Canyon Road. Dockweiler Drive will include a shared left-through-right lane accommodating right turning movements to Placerita Canyon Road and the west leg (12<sup>th</sup> Street). The east leg (12<sup>th</sup> Street) will include a shared left-through-right lane accommodating left turning movements to Placerita Canyon Road and Dockweiler Drive. The west leg (12<sup>th</sup> Street) will include a shared left-through-right lane accommodating right turning movements to Dockweiler Drive and Placerita Canyon Road. Placerita Canyon Road will include a shared left-right lane accommodating left turning movements to Dockweiler Drive and west leg (12<sup>th</sup> Street) and right turning movements to the east leg (12<sup>th</sup> Street) and Arch Street.
4. Lyons Avenue (North-South) and Dockweiler Drive (East-West): Extend Lyons Avenue to intersect with Dockweiler Drive as a signalized T-intersection. The northbound direction will include two left turn lanes and a through lane. The southbound direction will include a through and two right turn lanes. The eastbound direction will include a left turn lane and two right turn lanes.

5. Railroad Avenue (North-South) and 13<sup>th</sup> Street (East-West): The railroad crossing to be closed. The intersection modifications include removing the northbound right turn lane and southbound left turn lane and restricting the eastbound through movement. The northbound direction will include a left turn lane and two through lanes. The southbound direction will include a through lane and a shared through-right turn lane. The eastbound direction will include a shared left-right turn lane.

### ***Year 2019 Regional Mitigations***

1. Sierra Highway (North-South) and SR-14 Freeway Southbound Ramps (East-West): The intersection modifications include installing a traffic signal and widening the southbound direct to provide an additional left turn lane. The northbound direction will include a through lane, and a shared through-right turn lane. The southbound direction will include two left turn lanes, and two through lanes. The eastbound direction will include a left turn lane and a right turn lane.
2. Sierra Highway (North-South) and Placerita Canyon Road (East-West): The intersection modifications include lane modifications to provide an exclusive right turn westbound lane and right turn northbound lane. The northbound direction will include a left turn lane, two through lanes, and a right turn lane. The south and eastbound directions will include a left turn lane, a through lane, and a shared through-right turn lane. The westbound direction will include a left turn lane, a through lane, and a right turn lane.
3. SR-14 Freeway Northbound Ramps (North-South) and Placerita Canyon Road (East-West): The intersection modifications include installing a traffic signal. The northbound direction will include a left turn lane and a right turn lane. The east and westbound directions will include two through lanes.
4. SR-14 Freeway Southbound Ramps (North-South) and Newhall Avenue (East-West): The intersection modifications include converting the east and southbound right turn lanes to free right turns and signalizing the intersection. The eastbound direction will include two through lanes and a free right turn lane. The southbound direction will include a shared through-left turn lane and a free right turn lane. The westbound direction will include a left turn lane and two through lanes.
5. Newhall Avenue (North-South) and Lyons Avenue (East-West): The intersection modifications include converting the eastbound through-right lane to a right turn lane. The northbound direction will include two left turn lanes and a shared through-right lane. The southbound direction will include a left turn lane and a shared through-right lane. The east and westbound directions will include a left turn lane, two through lanes, and a right turn lane.

### ***Year 2035 Project Mitigations***

1. Valle Del Oro (North-South) and Dockweiler Drive (East-West): Install a traffic signal. The Intersection modifications include signaling the intersection and widening the east and west bound direction to accommodate an additional through lane and widening the northbound direction to accommodate an exclusive right turn lane. The northbound direction will include a shared left-through lane and a right turn lane. The southbound direction will include a shared left-through-right turn lane. The east and westbound directions will include a left turn lane, a through, and a shared through-right turn lane.

### ***Year 2035 Regional Mitigations***

1. Sierra Highway (North-South) and Placerita Canyon Road (East-West): The Intersection modifications include widening to accommodate lane modifications to all approaches. Widen the northbound direction to accommodate an additional through lane. Widen the east and southbound directions to accommodate two additional through lanes and restripe the shared through-right lane to a right turn only lane. Widen the westbound direction to accommodate two additional through lanes. The north, east, south, and westbound direction will include a left turn lane, three through lanes, and a right turn lane.
2. Sierra Highway (North-South) and Newhall Avenue (East-West): Intersection modifications include converting the northbound through-right turn lane to a through lane and widening to accommodate a free right turn. The northbound direction will include two left turn lanes, two through lanes, and a free right turn. The southbound direction will include a left turn lane, two through lanes, and a shared through-right turn lane. The east and westbound directions will include two left turn lane, three through lanes, and a right turn lane.
3. Main Street (north leg) / Newhall Avenue (south leg) / Newhall Avenue (west leg): The intersection modifications include widening the northbound direction to accommodate a left turn lane and the eastbound direction to accommodate a right turn lane. Newhall Avenue (south leg) will include a left turn lane and a shared left-through lane. Main Street will include a shared right-through lane. Newhall Avenue (east leg) will include a shared left-right lane and a right turn lane.

## 7.2 Alternative 1

### ***Year 2019 Project Mitigations***

1. Dockweiler Drive extension: Construct to full Secondary Highway Pavement width, from Aden Avenue to west of Valle Del Oro, providing two lanes eastbound (uphill) and one lane westbound (downhill), as necessary. May be striped for parking lane on both sides of roadway in interim condition. Class II Bike lanes and Pedestrian Sidewalks to be provided.
2. Railroad Avenue (North-South) and Lyons Avenue (East-West): Construct the railroad crossing and improve the intersection. The intersection improvements will include widening the northbound direction to accommodate an additional left turn lane and convert a through lane to a shared through-right lane and southbound direction to accommodate an additional left turn lane and convert the right turn lane to a shared through-right turn lane. The north and southbound directions will include two left turn lanes, a through lane, and a shared through-right turn lane. The eastbound direction will provide a left turn lane, a through lane, and a shared through-right turn lane. The westbound direction will provide a left turn lane, two through lanes and a right turn lane.
3. Arch Street (north leg) / Dockweiler Drive (south leg) / 12<sup>th</sup> Street (east and west legs) / Placerita Canyon Road (southeast leg): Convert intersection to a 5-leg all way stop controlled intersection including Dockweiler Drive as the 5<sup>th</sup> leg. Arch Street will include a shared left-through-right lane accommodating left turning movements to the west leg (12<sup>th</sup> Street) and Placerita Canyon Road. Dockweiler Drive will include a shared left-through-right lane accommodating right turning movements to Placerita Canyon Road and the west leg (12<sup>th</sup> Street). The east leg (12<sup>th</sup> Street) will include a shared left-through-right lane accommodating left turning movements to Placerita Canyon Road and Dockweiler Drive. The west leg (12<sup>th</sup> Street) will include a shared left-through-right lane accommodating right turning movements to Dockweiler Drive and Placerita Canyon Road. Placerita Canyon Road will include a shared left-right lane accommodating left turning movements to Dockweiler Drive and west leg (12<sup>th</sup> Street) and right turning movements to the east leg (12<sup>th</sup> Street) and Arch Street.
4. Lyons Avenue (North-South) and Dockweiler Drive (East-West): Extend Lyons Avenue to intersect with Dockweiler Drive as a signalized T-intersection. The northbound direction will include a left turn lane and a through lane. The southbound direction will include a through and a right turn lane. The eastbound direction will include a left turn lane and a right turn lane.

### ***Year 2019 Regional Mitigations***

1. Sierra Highway (North-South) and SR-14 Freeway Southbound Ramps (East-West): Install a traffic signal and provide an additional southbound left turn lane. The northbound direction will include a through lane, and a shared through-right turn lane. The southbound direction will include two left turn lanes, and two through lanes. The eastbound direction will include a left turn lane and a right turn lane.

2. Sierra Highway (North-South) and Placerita Canyon Road (East-West): Lane modifications to provide an exclusive right turn westbound lane and right turn northbound lane. The northbound direction will include a left turn lane, two through lanes, and a right turn lane. The south and eastbound directions will include a left turn lane, a through lane, and a shared through-right turn lane. The westbound direction will include a left turn lane, a through lane, and a right turn lane.
3. SR-14 Freeway Northbound Ramps (North-South) and Placerita Canyon Road (East-West): Install a traffic signal. The northbound direction will include a left turn lane and a right turn lane. The east and westbound directions will include two through lanes.
4. SR-14 Freeway Southbound Ramps (North-South) and Newhall Avenue (East-West): Intersection modifications include converting the east and southbound right turn lanes to free right turns and signaling the intersection. The eastbound direction will include two through lanes and a free right turn lane. The southbound direction will include a shared through-left turn lane and a free right turn lane. The westbound direction will include a left turn lane and two through lanes.

#### ***Year 2035 Project Mitigations***

1. Valle Del Oro (North-South) and Dockweiler Drive (East-West): Install a traffic signal. The Intersection modifications include signaling the intersection and widening the east and west bound direction to accommodate an additional through lane and widening the northbound direction to accommodate an exclusive right turn lane. The northbound direction will include a shared left-through lane and a right turn lane. The southbound direction will include a shared left-through-right turn lane. The east and westbound directions will include a left turn lane, a through, and a shared through-right turn lane.

#### ***Year 2035 Regional Mitigations***

1. Sierra Highway (North-South) and Placerita Canyon Road (East-West): The Intersection modifications include widening to accommodate lane modifications to all approaches. Widen the northbound direction to accommodate an additional through lane. Widen the east and southbound directions to accommodate two additional through lanes and restripe the shared through-right lane to a right turn only lane. Widen the westbound direction to accommodate two additional through lanes. The north, east, south, and westbound direction will include a left turn lane, three through lanes, and a right turn lane.
2. Sierra Highway (North-South) and Newhall Avenue (East-West): Intersection modifications include converting the northbound through-right turn lane to a through lane and widening to accommodate a free right turn. The northbound direction will include two left turn lanes, two through lanes, and a free right turn. The southbound direction will include a left turn lane, two through lanes, and a shared through-right turn lane. The east and westbound directions will include two left turn lane, three through lanes, and a right turn lane.

3. Main Street (north leg) / Newhall Avenue (south leg) / Newhall Avenue (west leg): Widen the south leg to accommodate a left turn lane and the west leg to accommodate a right turn lane. Newhall Avenue (south leg) will include a left turn lane and a shared left-through lane. Main Street will include a shared right-through lane. Newhall Avenue (east leg) will include a shared left-right lane and a right turn lane.

### 7.3 Alternative 2

#### **Year 2019 Project Mitigations**

1. Dockweiler Drive extension: Construct to full Secondary Highway Pavement width, from Aden Avenue to west of Valle Del Oro, providing two lanes eastbound (uphill) and one lane westbound (downhill), as necessary. May be striped for parking lane on both sides of roadway in interim condition. Class II Bike lanes and Pedestrian Sidewalks to be provided.
2. Arch Street (north leg) / Dockweiler Drive (south leg) / 12<sup>th</sup> Street (east and west legs) / Placerita Canyon Road (southeast leg): Convert intersection to a 5-leg all way stop controlled intersection including Dockweiler Drive as the 5<sup>th</sup> leg. Arch Street will include a shared left-through-right lane accommodating left turning movements to the west leg (12<sup>th</sup> Street) and Placerita Canyon Road. Dockweiler Drive will include a shared left-through-right lane accommodating right turning movements to Placerita Canyon Road and the west leg (12<sup>th</sup> Street). The east leg (12<sup>th</sup> Street) will include a shared left-through-right lane accommodating left turning movements to Placerita Canyon Road and Dockweiler Drive. The west leg (12<sup>th</sup> Street) will include a shared left-through-right lane accommodating right turning movements to Dockweiler Drive and Placerita Canyon Road. Placerita Canyon Road will include a shared left-right lane accommodating left turning movements to Dockweiler Drive and west leg (12<sup>th</sup> Street) and right turning movements to the east leg (12<sup>th</sup> Street) and Arch Street.

#### **Year 2019 Regional Mitigations**

1. Sierra Highway (North-South) and SR-14 Freeway Southbound Ramps (East-West): The intersection modifications include installing a traffic signal and widening the southbound direct to provide an additional left turn lane. The northbound direction will include a through lane, and a shared through-right turn lane. The southbound direction will include two left turn lanes, and two through lanes. The eastbound direction will include a left turn lane and a right turn lane.
2. Sierra Highway (North-South) and Placerita Canyon Road (East-West): The intersection modifications include lane modifications to provide an exclusive right turn westbound lane and right turn northbound lane. The northbound direction will include a left turn lane, two through lanes, and a right turn lane. The south and eastbound directions will include a left turn lane, a through lane, and a shared through-right turn lane. The westbound direction will include a left turn lane, a through lane, and a right turn lane.



3. SR-14 Freeway Northbound Ramps (North-South) and Placerita Canyon Road (East-West): The intersection modifications include installing a traffic signal. The northbound direction will include a left turn lane and a right turn lane. The east and westbound directions will include two through lanes.
4. SR-14 Freeway Southbound Ramps (North-South) and Newhall Avenue (East-West): The intersection modifications include converting the east and southbound right turn lanes to free right turns and signaling the intersection. The eastbound direction will include two through lanes and a free right turn lane. The southbound direction will include a shared through-left turn lane and a free right turn lane. The westbound direction will include a left turn lane and two through lanes.
5. Newhall Avenue (North-South) and Lyons Avenue (East-West): The intersection modifications include converting the eastbound through-right lane to a right turn lane. The northbound direction will include two left turn lanes and a shared through-right lane. The southbound direction will include a left turn lane and a shared through-right lane. The east and westbound directions will include a left turn lane, two through lanes, and a right turn lane.

#### ***Year 2035 Project Mitigations***

1. Railroad Avenue (North-South) and 13<sup>th</sup> Street (East-West): The intersection modifications include widening the south and westbound direction to include a left turn lane. The northbound direction will include a left turn lane, two through lanes and a right turn lane. The southbound direction will include two left turn lanes, through lane, and a shared through-right turn lane. The eastbound direction will include a shared left-through-right turn lane. The westbound direction will include a left turn lane, a through, and a right turn lane.

#### ***Year 2035 Regional Mitigations***

1. Sierra Highway (North-South) and Placerita Canyon Road (East-West): The Intersection modifications include widening to accommodate lane modifications to all approaches. Widen the northbound direction to accommodate an additional through lane. Widen the east and southbound directions to accommodate two additional through lanes and restripe the shared through-right lane to a right turn only lane. Widen the westbound direction to accommodate two additional through lanes. The north, east, south, and westbound direction will include a left turn lane, three through lanes, and a right turn lane.
2. Sierra Highway (North-South) and Newhall Avenue (East-West): Intersection modifications include converting the northbound through-right turn lane to a through lane and widening to accommodate a free right turn. The northbound direction will include two left turn lanes, two through lanes, and a free right turn. The southbound direction will include a left turn lane, two through lanes, and a shared through-right turn lane. The east and westbound directions will include two left turn lane, three through lanes, and a right turn lane.



3. Main Street (north leg) / Newhall Avenue (south leg) / Newhall Avenue (west leg): The intersection modifications include widening the northbound direction to accommodate a left turn lane and the eastbound direction to accommodate a right turn lane. Newhall Avenue (south leg) will include a left turn lane and a shared left-through lane. Main Street will include a shared right-through lane. Newhall Avenue (east leg) will include a shared left-right lane and a right turn lane.



## **8 APPENDIX**

**Appendix A: Model Plots**

**Appendix B: Intersection Capacity Analysis Calculations**